
LENA LINEAR 20

LENA LINEAR 20 LED è un apparecchio di illuminazione lineare dal design moderno ed essenziale, progettato per offrire un'illuminazione uniforme e omogenea con un profilo minimalista. Il suo design sottile ed elegante si integra perfettamente negli ambienti architettonici contemporanei. Ideale per uffici, negozi, strutture ricettive, spazi commerciali e residenziali, combina la tecnologia LED ad alta efficienza energetica con prestazioni affidabili e durature. Unendo un'estetica pulita a un'eccellente qualità della luce, LENA LINEAR 20 LED garantisce un'illuminazione efficiente ed elegante per ogni ambiente interno.

LENA LINEAR 20 LED is a sleek, modern linear light designed to provide smooth, uniform illumination with a minimalist profile. Its slim and elegant design integrates seamlessly into contemporary architectural spaces. Ideal for offices, retail, hospitality, commercial, and residential environments, it combines energy-efficient LED technology with reliable, long-lasting performance. Blending clean aesthetics with excellent lighting quality, LENA LINEAR 20 LED delivers efficient and stylish illumination for any interior.






Description


Housing -Die cast aluminium powder coated with choice of RAL colors
Diffuser - Tempered clear glass.
Reflector - Anodized aluminium reflector with optical PMMA refletor lens.
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W m UGR<19)
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722 , Glowing Wire Test 850°

Model	Power	Illuminance	Profile Size(mm)	Size
LENA LINEAR - 20	15W/m	1500Lm	W20mm×H20mm	Customizable

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- RGB

k

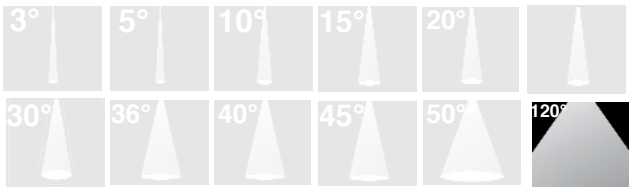

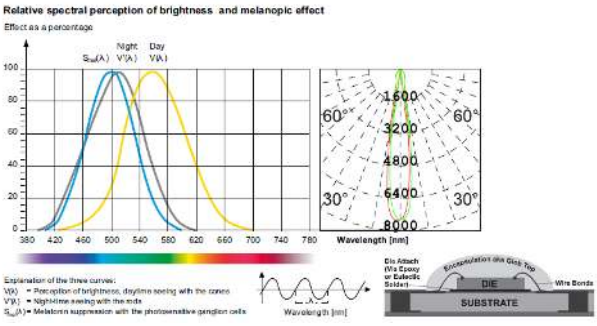

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC LIGHTING SOLUTIONS

SMD | IP20 IP44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.