
LENA RING 50



LENA RING 50 LED è un apparecchio di illuminazione lineare a forma di anello, progettato per offrire un'illuminazione uniforme e omogenea con un profilo circolare distintivo. Il suo design elegante crea un elemento architettonico di grande impatto, aggiungendo un tocco contemporaneo a qualsiasi ambiente interno. Ideale per uffici, negozi, strutture ricettive, spazi commerciali e residenziali, combina la tecnologia LED ad alta efficienza energetica con prestazioni affidabili e durature. Unendo un'estetica sofisticata a un'eccellente qualità della luce, LENA RING 50 LED valorizza ogni ambiente con stile e funzionalità.

LENA RING 50 LED is a modern ring-shaped linear light designed to deliver smooth, uniform illumination with a distinctive circular profile. Its elegant design creates a striking architectural feature, adding a contemporary touch to any interior. Ideal for offices, retail, hospitality, commercial, and residential spaces, it combines energy-efficient LED technology with reliable, long-lasting performance. Blending sophisticated aesthetics with excellent lighting quality, LENA RING 50 LED enhances every environment with style and functionality.




Description


Housing -Die cast aluminium powder coated with choice of RAL colors
Diffuser - Tempered clear glass.
Reflector - Anodized aluminium reflector with optical PMMA refletor lens.
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W m UGR<19)
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722 , Glowing Wire Test 850°

Model	Power	Illuminance	Profile Size(mm)	Size
LENA RING 50	40W/m	4000Lm	Ø50mm×H75mm	Customizable

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- RGB

k

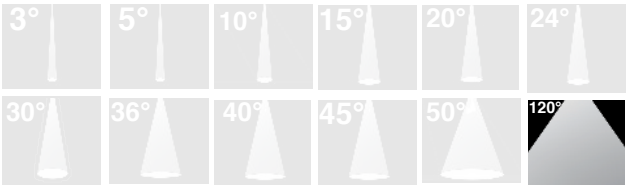

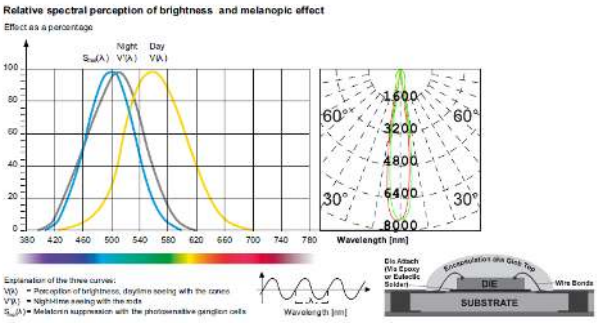

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

SMD | IP20 IP44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.