

LENA TRI 20

LENA TRI 20 LED è un apparecchio di illuminazione lineare triangolare dal design moderno, progettato per offrire un'illuminazione uniforme e omogenea con un profilo geometrico distintivo. Il suo design triangolare ed elegante aggiunge un tocco architettonico contemporaneo, creando un elemento visivo unico in qualsiasi ambiente interno. Ideale per uffici, negozi, strutture ricettive, spazi commerciali e residenziali, combina la tecnologia LED ad alta efficienza energetica con prestazioni affidabili e durature. Unendo un design innovativo a un'eccellente qualità della luce, LENA TRI 20 LED garantisce un'illuminazione elegante ed efficiente per gli ambienti moderni.



LENA TRI 20 LED is a modern triangular linear light designed to deliver smooth, uniform illumination with a distinctive geometric profile. Its sleek triangular design adds a contemporary architectural touch, creating a unique visual statement in any interior. Ideal for offices, retail, hospitality, commercial, and residential spaces, it combines energy-efficient LED technology with reliable, long-lasting performance. Blending innovative design with excellent lighting quality, LENA TRI 20 LED provides stylish and efficient illumination for modern environments.

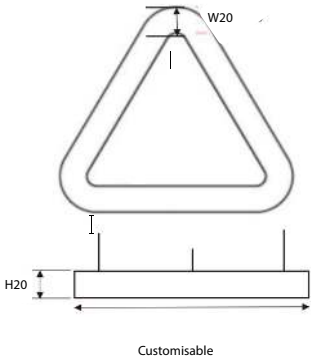


Customisable


Description

Housing -Die cast aluminium powder coated with choice of RAL colors
Diffuser - Tempered clear glass.
Reflector - Anodized aluminium reflector with optical PMMA refletor lens.
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W m UGR<19)
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722 , Glowing Wire Test 850°

Model	Power	Illuminance	Profile Size(mm)	Size
LENA TRI - 20	15W/m	1500Lm	W20mm×H20mm	Customizable

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- RGB

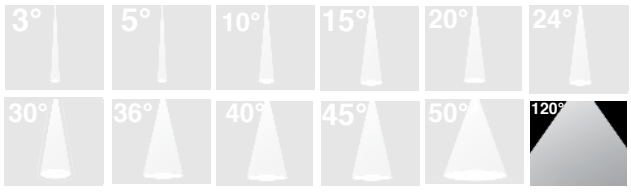

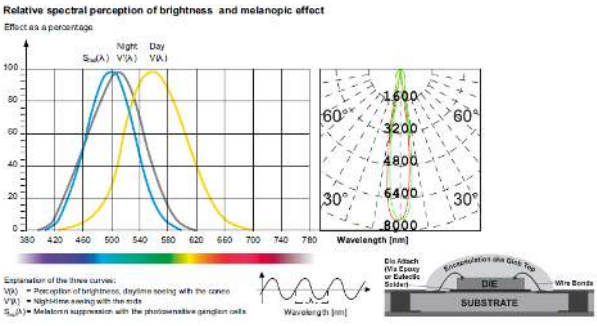

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC LIGHTING SOLUTIONS

SMD | IP20 IP44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.