
LIVIO

LIVIO Spot Light offre un'illuminazione precisa e direzionata, con un design elegante e moderno. Le sue versatili prestazioni illuminotecniche valorizzano i dettagli architettonici e creano effetti luminosi equilibrati e visivamente armoniosi. Ideale per applicazioni architettoniche, commerciali, retail, hospitality e residenziali. Combinando estetica contemporanea, prestazioni affidabili e illuminazione efficiente, LIVIO arricchisce ogni ambiente con una luce elegante e funzionale.



LIVIO Spot Light offers precise and focused illumination with a sleek, modern design. Its versatile lighting performance highlights architectural details and creates balanced, visually appealing lighting effects. Ideal for architectural, commercial, retail, hospitality, and residential applications. Combining contemporary aesthetics, reliable performance, and efficient illumination, LIVIO enhances every interior with elegant and functional lighting.





Description

Housing -Die cast aluminium powder coated with choice of RAL colors
Diffuser - Tempered clear glass.
Reflector - Anodized aluminium reflector with optical PMMA refletor lens.
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722 Glowing wire Test 850°.

Model	Power	Illuminance	Size(mm)	Cutout
LIVIO 7	15W	1500Lm	Ø82mm×H98mm	Ø75mm
LIVIO 9	18W	1800Lm	Ø105mm×H120mm	Ø95mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

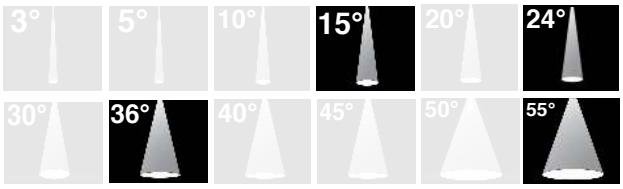

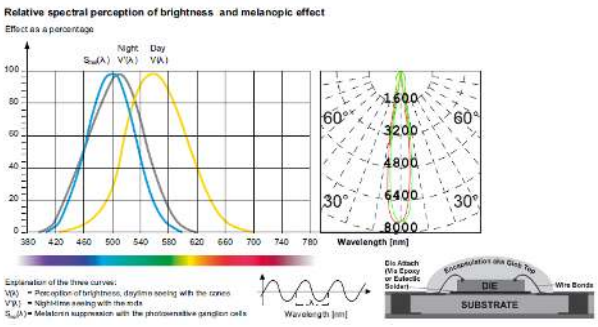

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC LIGHTING SOLUTIONS

LED | IP 44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | | ENERGY STAR | COMPLIANCE LM-79 TM-21 LM-80 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.