
LORENA

LORENA Magnetic Tube Light presenta un design elegante e contemporaneo che si integra perfettamente nei sistemi di illuminazione a binario magnetico, offrendo una luce uniforme e armoniosa. Il suo profilo tubolare raffinato si adatta agli interni moderni, creando un effetto luminoso pulito e minimalista. Adatto ad applicazioni residenziali, commerciali, retail e hospitality. Combinando un'estetica ricercata con una funzionalità versatile, LORENA offre una soluzione illuminotecnica sofisticata per i sistemi a binario magnetico contemporanei.

LORENA Magnetic Tube Light features a sleek, contemporary design that integrates seamlessly into magnetic track lighting systems, providing smooth and uniform illumination. Its elegant tubular profile complements modern interiors, creating a clean and minimalist lighting effect. Suitable for residential, commercial, retail, and hospitality applications. Combining refined aesthetics with versatile functionality, LORENA offers a sophisticated lighting solution for contemporary magnetic track systems.







Description

Housing -Die cast aluminium powder coated with choice of RAL colors
Diffuser - Tempered clear glass.
Reflector - Anodized aluminium reflector with optical PMMA refletor lens.
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722 Glowing wire Test 850°.

Model	Power	Illuminance	Size(mm)	Voltage
LORENA 5	5W	500Lm	L66×W35×H90mm	DC48V
LORENA 10	10W	1000Lm	L100×W45×H110mm	DC48V
LORENA 15	15W	1500Lm	L135×W55×H125mm	DC48V

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

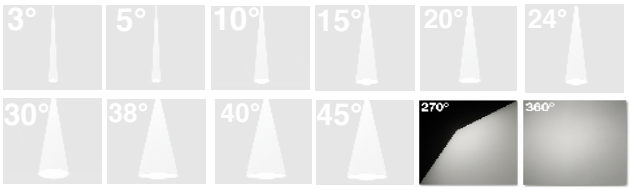

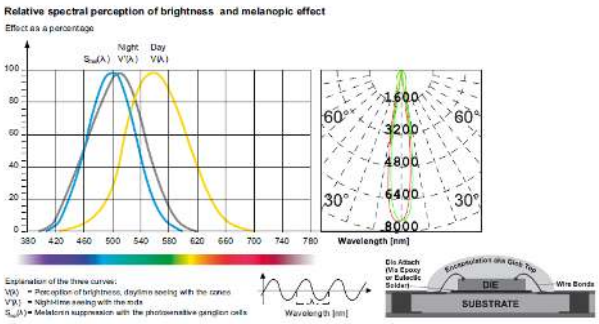

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC LIGHTING SOLUTIONS

LED | IP 20 IP 44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

ANTI GLARE | EYE COMFORT | -25°C - 55°C | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.