LUCEA ACCESSORIES




Model	Thickness	voltage	Product size
R20-A1	2.0mm	DC48V	W65*H46.9*T2.0

R20-A concealed gray 4-wire magnetic track strip




Model	Thickness	voltage	Product size
R20-A2	1.5mm	DC48V	W62.5*H46.8*T1.5

R20-A concealed gray 4-wire magnetic track strip




Model	Thickness	voltage	Product size
S20-1	2.0mm	DC48V	W27.5*H52.1*T2.0

S20 surface-mounted thickened 4-wire magnetic track strip




Model	Thickness	voltage	Product size
S20-2	1.5mm	DC48V	W26.4*H50.5*T1.50

S20 surface mounted 4-wire magnetic track strip









Model	Thickness	voltage	Product size	Model	Thickness	voltage	Product size	Model	Thickness	voltage	Product size
R20-B1	1.7mm	DC48V	W55.9*H46.4*T1.7	R20-B2	2.0mm	DC48V	W55.9*H46.4*T2.0	R20-B3	2.0mm	DC48V	W64.8*H46.4*T2.0

R20-B concealed plywood 4-wire magnetic track strip



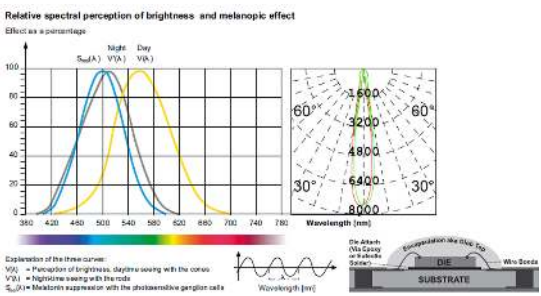

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP20 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.