
LUCEA FLOOD ADJ

Il faretto orientabile Lucea Flood ADJ Magnetic Track Light presenta un design elegante e architettonico protetto da brevetti di struttura ed estetica. Realizzato in alluminio pressofuso ad alta pressione con un doppio rivestimento in polvere anticorrosione, offre un riposizionamento magnetico senza l'uso di attrezzi e un'illuminazione a antiriflesso per il massimo comfort visivo e la massima efficienza energetica.



Lucea Flood ADJ Magnetic Track Light features a sleek, architectural design backed by structural and appearance patents. Crafted from high-pressure die-cast aluminum with a double anti-corrosion powder coating, it offers tool-free magnetic repositioning and glare-controlled illumination for maximum visual comfort and energy efficiency.




Description


Housing - High-pressure die-cast aluminium and aluminium alloy with outdoor double anti-corrosion powder coating (White / Black). Designed for 48V Magnetic Track systems.
Diffuser - Tempered clear glass / optical PMMA lens.
Reflector - High-efficiency optical lens with precision beam control (24° / 100° / 105° / 110° / 120°).
LED - Sustainable energy savings enabled by advanced LED technology (CRI Ra>90, Efficiency: 100 Lm/W).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h, Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722

Model	Power	Illuminance	Size(mm)	Voltage
LUCEA FLOOD ADJ6	6W	600Lm	L110*W22*H110mm	DC48V
LUCEA FLOOD ADJ12	12W	1200Lm	L220*W22*H110mm	DC48V
LUCEA FLOOD ADJ18	18W	1800Lm	L330*W22*H110mm	DC48V

- **6500 K**
- **6000 K**
- **5000 K**
- **4000 K**
- **3000 K**
- **2700 K**
- **TUNABLE SMART**

k

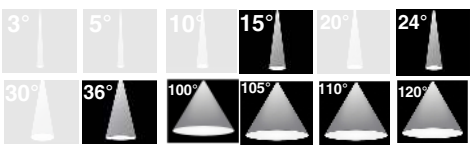

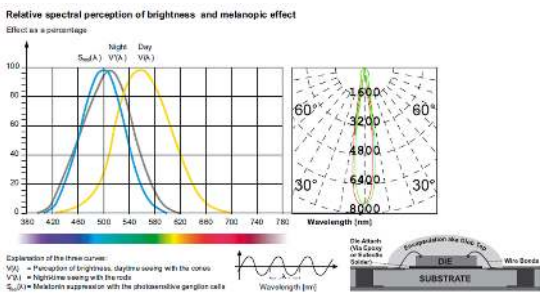

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP20 IP44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.