
LUCEA FLOOD

LUCEA FLOOD Magnetic Track Light presenta un design elegante e architettonico supportato da brevetti di struttura e di aspetto. Realizzato in alluminio pressofuso ad alta pressione con LED rientrato per una gestione termica ottimale, offre un riposizionamento magnetico senza l'uso di attrezzi, un controllo di precisione del fascio luminoso e un'illuminazione antiriflesso per un comfort visivo superiore e un'eccellente qualità della luce.

LUCEA FLOOD Magnetic Track Light features a sleek, architectural design backed by structural and appearance patents. Crafted from high-pressure die-cast aluminum with recessed LED positioning for optimal thermal management, it offers tool-free magnetic repositioning, precision beam control, and glare-free illumination for superior visual comfort and supreme light quality.






Description


Housing - High-pressure die-cast aluminium housing with solvent-free outdoor double anti-corrosion powder coating (White / Black). Designed for 48V Magnetic Track systems.
Diffuser - Polycarbonate pattern lens.
Reflector - Anodized aluminum with precision beam control (100° / 105° / 110° / 120°).
LED - Sustainable energy savings enabled by advanced LED technology (Efficiency: 100 Lm/W, UGR<19).. L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h, Ta -20°C ~ 50°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722, Glowing Wire Test 850°

Model	Power	Illuminance	Size(mm)	Voltage
LUCEA FLOOD12	12W	1200Lm	Ø300-22-43mm	DC48V
LUCEA FLOOD24	24W	2400Lm	Ø600-22-43mm	DC48V
LUCEA FLOOD36	36W	3600Lm	Ø900-22-43mm	DC48V
LUCEA FLOOD48	48W	4800Lm	Ø1200-22-43mm	DC48V

- **6500 K**
- **6000 K**
- **5000 K**
- **4000 K**
- **3000 K**
- **2700 K**
- **TUNABLE SMART**

k

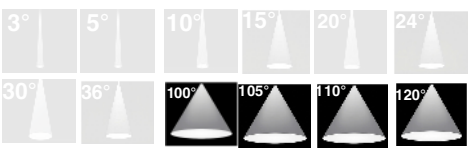

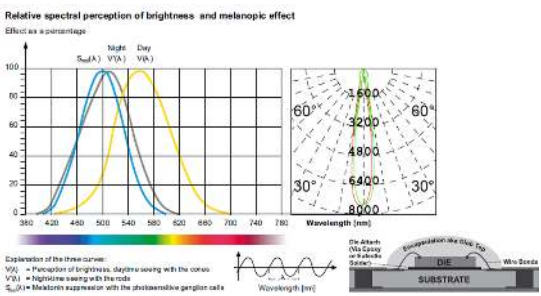

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP20 IP44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.