
LUCEA GRILLE ADJ

LUCEA GRILLE ADJ Magnetic Track Light presenta un design ultra-sottile e architettonico progettato per ambienti dinamici. Realizzato con un'avanzata tecnologia di montaggio magnetico, offre un posizionamento senza l'uso di utensili, una luminosità uniforme e un controllo preciso del fascio ottico per l'illuminazione d'accento e d'ambiente—garantendo un'estetica del soffitto pulita e un'elevata qualità visiva per spazi di lusso.



LUCEA GRILLE ADJ Magnetic Track Light features an ultra-slim, architectural design engineered for dynamic environments. Crafted with advanced magnetic mounting technology, it offers tool-free repositioning, uniform brightness, and precise optical beam control for accent and ambient lighting—delivering a clutter-free ceiling aesthetic and superior visual quality for luxury spaces.




Description


Housing - High-pressure die-cast aluminium housing with solvent-free outdoor double anti-corrosion powder coating (White / Black). Designed for 48V Magnetic Track systems.
Diffuser - Polycarbonate pattern lens.
Reflector - Anodized aluminum with precision beam control (15° / 24° / 36° / 60°).
LED - Sustainable energy savings enabled by advanced LED technology (Efficiency: 100 Lm/W, UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h, Ta -20°C ~ 50°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722, Glowing Wire Test 850°

Model	Power	Illuminance	Size(mm)	Voltage
LUCEA GRILLE ADJ6	6W	600Lm	Ø115-22-105mm	DC48V
LUCEA GRILLE ADJ12	12W	1200Lm	Ø215-22-105mm	DC48V
LUCEA GRILLE ADJ18	18W	1800Lm	Ø315-22-105mm	DC48V
LUCEA GRILLE ADJ24	24W	2400Lm	Ø415-22-105mm	DC48V
LUCEA GRILLE ADJ36	36W	3600Lm	Ø515-22-105mm	DC48V

- **6500 K**
- **6000 K**
- **5000 K**
- **4000 K**
- **3000 K**
- **2700 K**
- **TUNABLE SMART**

k

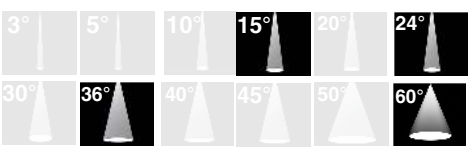

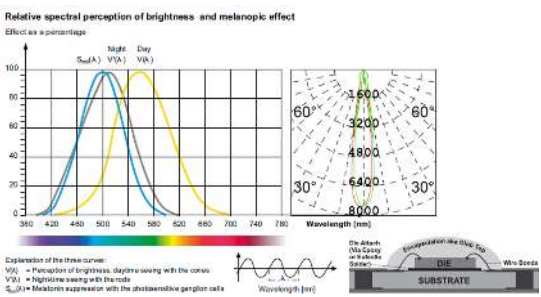

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP20 IP44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.