
LUCEA GRILLE

LUCEA GRILE Magnetic Track Light presenta un design elegante e architettonico ideato per la massima flessibilità spaziale. Realizzato in alluminio pressofuso ad alta pressione con un doppio rivestimento in polvere anticorrosione, offre un riposizionamento magnetico senza l'uso di attrezzi e un'illuminazione a antiriflesso di precisione per un comfort visivo superiore e un'elevata efficienza energetica.

LUCEA GRILE Magnetic Track Light features a sleek, architectural design engineered for maximum spatial flexibility. Crafted from high-pressure die-cast aluminum with a double anti-corrosion powder coating, it offers tool-free magnetic repositioning and precision glare-controlled illumination for superior visual comfort and energy efficiency.






Description


Housing - High-pressure die-cast aluminium and aluminium alloy with outdoor double anti-corrosion powder coating (White / Black). Designed for 48V Magnetic Track systems.
Diffuser - Tempered clear glass / optical PMMA lens.
Reflector - High-efficiency optical lens with precision beam control (15° / 24° / 36° / 60°).
LED - Sustainable energy savings enabled by advanced LED technology (Efficiency: 100 Lm/W).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h, Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722

Model	Power	Illuminance	Size(mm)	Voltage
LUCEA MAGNETIC GRILE6	6W	600Lm	Ø112-22-45mm	DC48V
LUCEA MAGNETIC GRILE12	12W	1200Lm	Ø220-22-45mm	DC48V
LUCEA MAGNETIC GRILE18	18W	1800Lm	Ø330-22-45mm	DC48V
LUCEA MAGNETIC GRILE24	24W	2400Lm	Ø436-22-45mm	DC48V
LUCEA MAGNETIC GRILE36	36W	3600Lm	Ø653-22-45mm	DC48V

- **6500 K**
- **6000 K**
- **5000 K**
- **4000 K**
- **3000 K**
- **2700 K**
- **TUNABLE SMART**

k

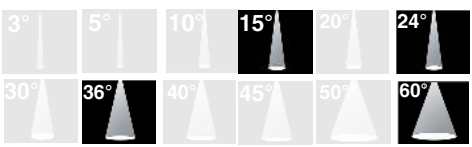

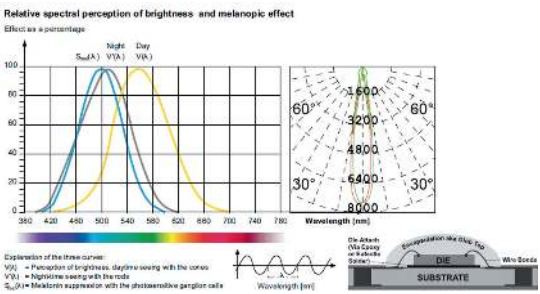

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP20 IP44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.