
LUCEA SPOT

LUCEA SPOT Magnetic Light vanta un design moderno ed essenziale coperto da brevetti di struttura e design. Realizzato in alluminio pressofuso ad alta pressione con doppia protezione anticorrosione a polvere, garantisce una durata eccezionale. Dotato di LED ad alta efficienza e alimentatore a corrente costante, assicura la massima resa luminosa ed efficienza energetica.

LUCEA SPOT Magnetic Light features a clean, contemporary design backed by structural and appearance patents. Crafted from high-pressure die-cast aluminum with a double anti-corrosion powder coating, it ensures exceptional durability. Equipped with high-efficiency LEDs and a constant current driver, it delivers maximum light output and energy efficiency.






Description


Housing - High-pressure die-cast aluminium and aluminium alloy with outdoor double anti-corrosion powder coating (White / Black). Designed for 48V Magnetic Track systems.
Diffuser - Tempered clear glass / optical PMMA lens.
Reflector - High-efficiency optical lens with precision beam control (15° / 24° / 36° / 60°)**.**
LED - sustainable energy savings enabled by advanced LED technogy
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h, Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722

Model	Power	Illuminance	Size(mm)	Voltage
LUCEA SPOT7	7W	700Lm	Ø38mm×H70mm	DC48V
LUCEA SPOT12	12W	1200Lm	Ø48mm×H118mm	DC48V
LUCEA SPOT20	20W	2000Lm	Ø68mm×H155mm	DC48V

- **6500 K**
- **6000 K**
- **5000 K**
- **4000 K**
- **3000 K**
- **2700 K**
- **TUNABLE SMART**

k

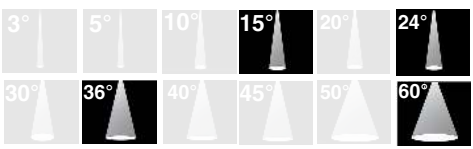

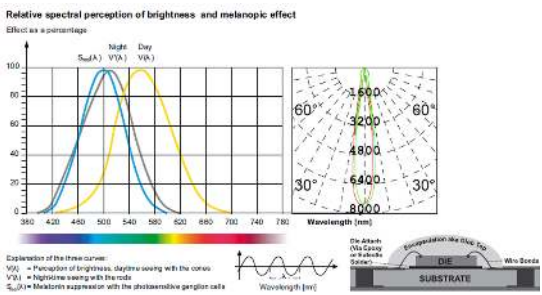

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP20 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | TRIDONIC | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | UL | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.