
LUCEA TUBE

LUCEA TUBE è caratterizzato da un design modulare lineare magnetico ed elegante, progettato per applicazioni flessibili in ambito architettonico e espositivo. Realizzato con ottiche lineari ad alte prestazioni, offre un'installazione semplice, una distribuzione uniforme della luce e prestazioni affidabili a bassa tensione, garantendo una soluzione di illuminazione versatile e un'estetica moderna per gli ambienti contemporanei.

LUCEA TUBE features a sleek, modular linear magnetic design engineered for flexible architectural and display applications. Crafted with high-performance linear optics, it offers seamless installation, uniform light distribution, and reliable low-voltage performance—delivering a versatile lighting solution and modern aesthetic for contemporary environments.



Description

Housing - High-pressure die-cast aluminium housing with solvent-free double anti-corrosion powder coating (Black/White). Designed for magnetic track installation.
Diffuser - High-performance 360° optical diffuser for full-angle ambient light.
Reflector - Anodized aluminum optical component designed for uniform light transmission.
LED - Sustainable energy savings enabled by advanced LED technology (Efficiency: 100 Lm/W, UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h, Ta -20°C ~ 50°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722, Glowing Wire Test 850°

Model	Power	Illuminance	Size(mm)	Voltage
LUCEA TUBE-6	6W	600Lm	L405-W33-H33mm	DC 24V
LUCEA TUBE-8	8W	800Lm	L405-W33-H33mm	DC 24V


LUCEA I-Connector


LUCEA L-Connector


LUCEA Three-way T Connector


LUCEA Three-way vertical Y Connector


LUCEA Four-way cross Connector


LUCEA Four-way vertical K Connector


LUCEA Five-way vertical Connector


LUCEA External Input jack Connector


LUCEA External Input female Connector


LUCEA External Input jack


LUCEA External Input jack

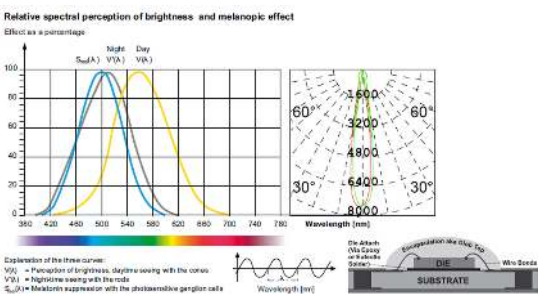

LUCEA power supply 200W

LUCEA power supply 200W

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

k





CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP20 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C~55°C | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.