
LUNAS SPOT RD-SM

LUNAS SPOT RD-SM è caratterizzato da un design cilindrico ed elegante montato in superficie, progettato per applicazioni architettoniche moderne. Realizzato con ottiche ad alte prestazioni, offre una luminosità uniforme, un controllo antiriflesso a incasso profondo e un'illuminazione affidabile, garantendo un profilo del soffitto lineare e un superiore comfort visivo per gli ambienti contemporanei.

LUNAS SPOT RD-SM features a sleek, surface-mounted cylindrical design engineered for modern architectural applications. Crafted with high-performance optics, it offers uniform brightness, deep-recessed anti-glare control, and reliable illumination—delivering a streamlined ceiling profile and superior visual comfort for contemporary environments.






Description


Housing - High-pressure die-cast aluminium housing with solvent-free double anti-corrosion powder coating (Sand White/Sand Black). Designed for surface-mounted installation.
Diffuser - Deep-recessed optical lens.
Reflector - Anodized aluminum with precision beam control (18°/26°/36°).
LED - Sustainable energy savings enabled by advanced LED technology (Efficiency: 100 Lm/W, UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h, Ta -20°C ~ 50°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722, Glowing Wire Test 850°

Model	Power	Illuminance	Size(mm)	Cutout
LUNAS SPOT RD-SM2	2W	200Lm	Ø31-56.3mm	Fixed
LUNAS SPOT RD-SM4	4W	400Lm	Ø36-61.3mm	Fixed
LUNAS SPOT RD-SM6	6W	600Lm	Ø42-66.3mm	Fixed
LUNAS SPOT RD-SM8	8W	800Lm	Ø50-76.7mm	Fixed

- **6500 K**
- **6000 K**
- **5000 K**
- **4000 K**
- **3000 K**
- **2700 K**
- **TUNABLE SMART**

k

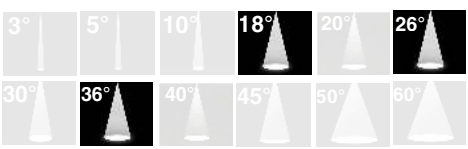

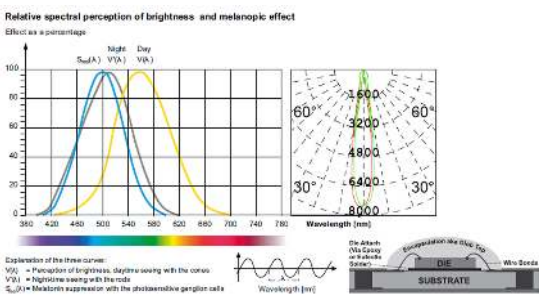

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.