
MARS

Il binario LED MARS offre un'illuminazione mirata e orientabile con un controllo preciso del fascio luminoso, ideale per applicazioni retail, commerciali, hospitality e residenziali. Il design elegante e resistente, unito alla tecnologia LED efficiente, garantisce un'eccellente distribuzione della luce, prestazioni affidabili e lunga durata.



MARS LED Track Light provides focused and adjustable illumination with precise beam control, ideal for retail, commercial, hospitality, and residential applications. Its sleek, durable design and efficient LED technology ensure excellent light distribution, reliable performance, and long-lasting use.

Description





Housing -Die cast aluminium powder coated with choice of RAL colors
Diffuser - Tempered clear glass.
Reflector - Anodized aluminium reflector with optical PMMA refletor lens.
LED - sustainable energy savings enabled by advanced LED technogy
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722

Model	Power	Illuminance	Size(mm)
MARS	30W	3000Lm	Ø75mm×H180mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K

k

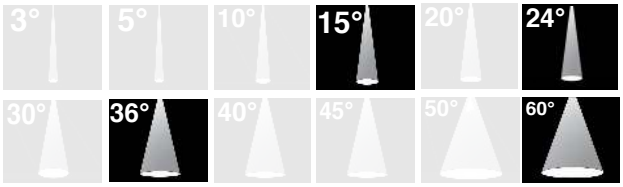

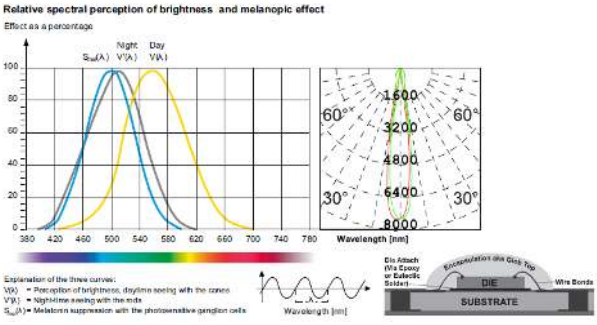

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP20 IP44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | ENERGY STAR | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.