
MARVO

MARVO Spot Light offre un'illuminazione precisa e direzionata, con un design elegante e contemporaneo. Le sue versatili prestazioni illuminotecniche valorizzano i dettagli architettonici e creano effetti luminosi raffinati e suggestivi. Ideale per applicazioni architettoniche, commerciali, retail, hospitality e residenziali. Combinando estetica moderna, prestazioni affidabili e illuminazione efficiente, MARVO valorizza ogni ambiente con eleganza, comfort e funzionalità.



MARVO Spot Light offers precise and focused illumination with a sleek, contemporary design. Its versatile lighting performance highlights architectural details and creates refined, visually appealing lighting effects. Ideal for architectural, commercial, retail, hospitality, and residential applications. Combining modern aesthetics, reliable performance, and efficient illumination, MARVO enhances every interior with elegance, comfort, and functionality.





Description

Housing -Die cast aluminium powder coated with choice of RAL colors
Diffuser - Tempered clear glass.
Reflector - Anodized aluminium reflector with optical PMMA refletor lens.
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722 Glowing wire Test 850°.

Model	Power	Illuminance	Size(mm)	Cutout
MARVO 7	7W	700Lm	Ø76mm×H76mm	Ø55mm
MARVO 9	9W	900Lm	Ø105mm×H78mm	Ø75mm
MARVO 12	12W	1200Lm	Ø105mm×H88mm	Ø75mm
MARVO 15	15W	1500Lm	Ø105mm×H98mm	Ø75mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

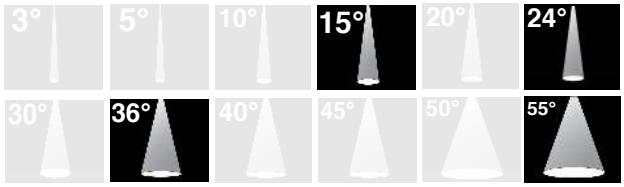

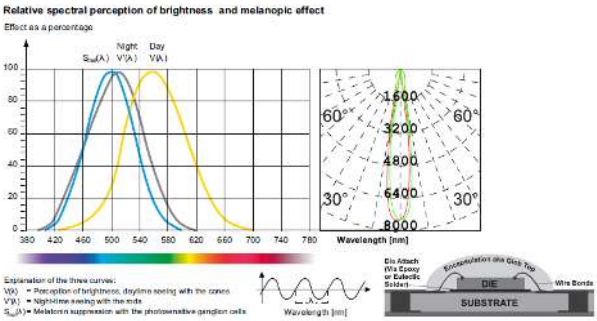

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP 44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.