MR16-M2 FRAME

M R16-M2 FRAME presenta un design elegante con un anello frontale fisso a incasso o un anello frontale regolabile fisso a incasso, progettato per applicazioni architettoniche moderne. Realizzato con ottiche di precisione ad alte prestazioni, offre un controllo stabile del posizionamento, un'illuminazione confortevole antiriflesso e prestazioni affidabili, garantendo un profilo del soffitto pulito e un comfort visivo superiore per gli ambienti contemporanei.

MR16-M2 FRAME features a sleek, fixed embedded face ring or adjustable embedded face ring engineered for modern architectural applications. Crafted with high-performance precision optics, it offers steady positioning control, comfortable anti-glare illumination, and reliable performance—delivering a seamless ceiling profile and superior visual comfort for contemporary environments.



Description


Housing - Die-cast aluminium with anti-corrosion powder coating (matte white, matte black, gun cup, bright silver).
Designed for recessed installation with a fixed embedded or adjustable embedded face ring.
Diffuser - Deep-recessed polycarbonate lens.
Reflector - Anodized aluminum with precision beam control.
LED - Sustainable energy savings enabled by advanced LED technology (Efficiency: 100 Lm/W, UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h, Ta -20°C ~ 50°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722, Glowing Wire Test 850°

Model	Power	Illuminance	Size(mm)	Cutout
MR16-M2 FRAME-65D	-	-	Ø90-43mm	Ø65mm
MR16-M2 FRAME-75D	-	-	Ø100-50mm	Ø75mm

- **6500 K**
- **6000 K**
- **5000 K**
- **4000 K**
- **3000 K**
- **2700 K**
- **TUNABLE SMART**

k



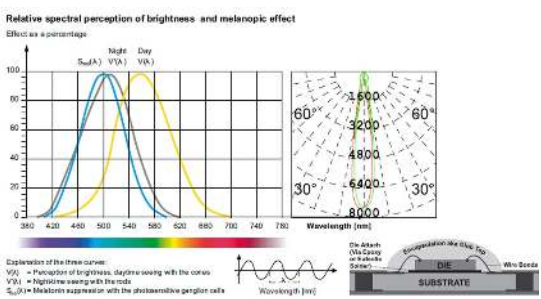

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP20 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | GLOWING WIRE TEST - 850° | RoHS | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.