
NARIO

NARIO Spot Light combina un design moderno con un'illuminazione mirata, creando un effetto luminoso raffinato per gli interni contemporanei.La sua forma elegante lo rende ideale per valorizzare dettagli architettonici, elementi decorativi e aree specifiche.Adatto ad applicazioni residenziali, commerciali, retail e hospitality. Grazie alla sua estetica pulita e alla versatilità illuminotecnica, NARIO unisce stile e funzionalità in ogni ambiente interno.



NARIO Spot Light combines a modern design with focused illumination, creating a refined lighting effect for contemporary interiors.Its elegant form makes it ideal for highlighting architectural details, decorative elements, and selected areas.Suitable for residential, commercial, retail, and hospitality applications. With its clean aesthetics and versatile lighting performance, NARIO brings style and functionality to any interior space.





Description

Housing -Die cast aluminium powder coated with choice of RAL colors
Diffuser - Tempered clear glass.
Reflector - Anodized aluminium reflector with optical PMMA refletor lens.
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722 Glowing wire Test 850°.

Model	Power	Illuminance	Size(mm)	Cutout
NARIO 9	9W	900Lm	Ø85mm×85mm×H78mm	Ø75mm
NARIO 12	12W	1200Lm	Ø85mm×85mm×H88mm	Ø75×75mm
NARIO 15	15W	1500Lm	Ø85mm×85mm×H98mm	Ø75×75mm
NARIO 2×7	14W	1400Lm	Ø115mm×62mm×H76mm	Ø105×55mm
NARIO 2×12	24W	2400Lm	Ø157mm×85mm×H88mm	Ø148×75mm
NARIO 2×15	30W	3000Lm	Ø157mm×85mm×H98mm	Ø148×75mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

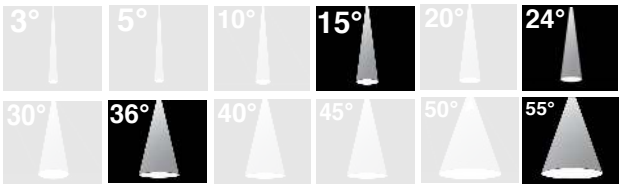

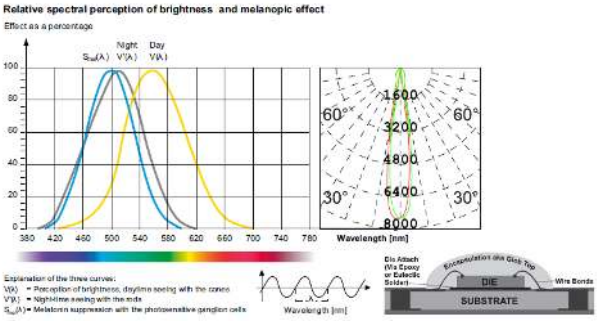

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP 44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.