
NERALI

NERALI presenta un design robusto e ad alte prestazioni per fari da esterno orientabili, progettato con ottiche di precisione per applicazioni paesaggistiche e di facciata architettonica moderne. Offre un puntamento direzionale flessibile, un'elevata resistenza agli agenti atmosferici e prestazioni affidabili, garantendo un'illuminazione d'accento potente e un comfort visivo superiore per ambienti esterni contemporanei.

NERALI features a robust, high-performance adjustable outdoor spotlight design engineered with precision optics for modern architectural landscape and facade applications. It offers flexible directional aiming, high weather resistance, and reliable performance—delivering powerful accent lighting with superior visual comfort for contemporary outdoor environments.










Description


Housing - High-grade aluminum construction with Tiger powder spraying surface treatment. Designed for outdoor adjustable installation
Diffuser - High-performance optical lens with precise beam control.
Reflector - Precision beam control (15°, 25°, 36°, 50°).
LED - Sustainable energy savings enabled by advanced LED technology (Efficiency: 100 Lm/W, UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h, Ta -20°C ~ 50°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722, Glowing Wire Test 850° ; IP66, IK08.


Model	Power	Illuminance	Size(mm)
NERALI-36	36W	3600Lm	Ø136-Ø150-326mm (Pole heights: 300/500/800/1000mm)

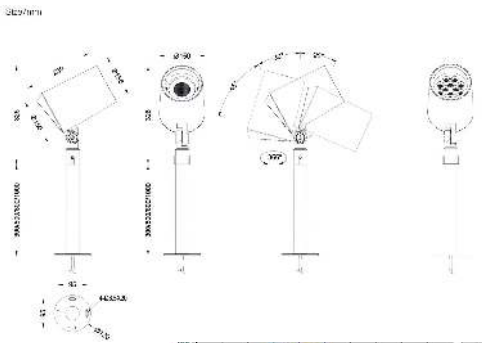

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

k

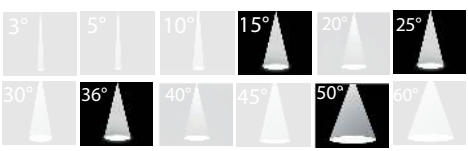

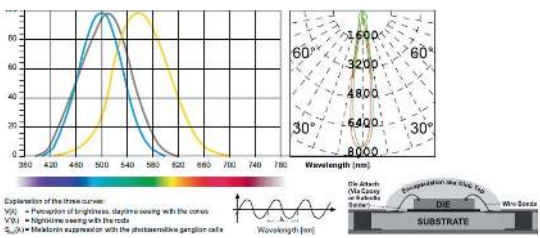

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP66 IK08 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.