
NIVIO

NIVIO Spot Light combina un design contemporaneo con un'illuminazione precisa e direzionale, valorizzando l'atmosfera degli interni moderni.Il suo aspetto raffinato lo rende ideale per mettere in risalto elementi architettonici, dettagli decorativi e aree specifiche.Adatto ad applicazioni residenziali, commerciali, retail e hospitality. Grazie alla sua estetica elegante e alla versatilità illuminotecnica, NIVIO offre una soluzione luminosa sofisticata e funzionale per gli spazi contemporanei.



NIVIO Spot Light combines contemporary design with precise, directional illumination, enhancing the atmosphere of modern interiors. Its refined appearance makes it ideal for highlighting architectural features, decorative elements, and selected areas. Suitable for residential, commercial, retail, and hospitality applications.With its elegant aesthetics and versatile lighting performance, NIVIO delivers a sophisticated and functional lighting solution for contemporary spaces.





Description

Housing -Die cast aluminium powder coated with choice of RAL colors
Diffuser - Tempered clear glass.
Reflector - Anodized aluminium reflector with optical PMMA refletor lens.
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722 Glowing wire Test 850°.

Model	Power	Illuminance	Size(mm)	Cutout
NIVIO 2×9	18W	1800Lm	Ø157mm×85mm×H78mm	Ø148×75mm
NIVIO 2×12	24W	2400Lm	Ø82mm×H98mm	Ø148×75mm
NIVIO 2×15	30W	3000Lm	Ø157mm×85mm×H98mm	Ø75×75mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

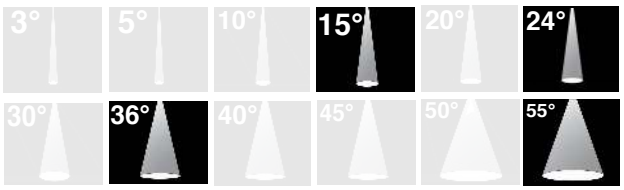

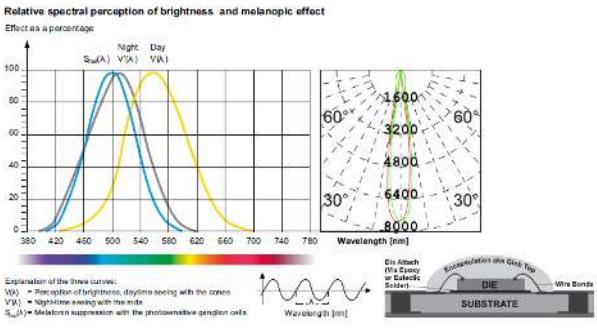

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP 44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE LM-79 TM-21 LM-80 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.