
NOREVA

NOREVA Magnetic Tube Light combina un design elegante e contemporaneo con un'illuminazione raffinata, creando un effetto luminoso ricercato negli interni moderni. Il suo profilo tubolare minimalista si integra perfettamente nei sistemi di illuminazione a binario magnetico, valorizzando l'estetica architettonica e mantenendo un aspetto pulito. Adatto ad applicazioni residenziali, commerciali, retail e hospitality. Grazie al suo design sofisticato e alla funzionalità versatile, NOREVA offre una soluzione luminosa elegante e pratica per i moderni sistemi di illuminazione magnetica.



NOREVA Magnetic Tube Light combines a sleek, contemporary design with elegant illumination, creating a refined lighting effect for modern interiors. Its minimalist tubular profile integrates seamlessly into magnetic track lighting systems, enhancing architectural aesthetics while maintaining a clean appearance. Suitable for residential, commercial, retail, and hospitality applications. With its sophisticated design and versatile lighting functionality, NOREVA offers a stylish and practical solution for contemporary magnetic lighting projects.





Description

Housing -Die cast aluminium powder coated with choice of RAL colors
Diffuser - Tempered clear glass.
Reflector - Anodized aluminium reflector with optical PMMA refletor lens.
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722 Glowing wire Test 850°.

Model	Power	Illuminance	Size(mm)	Voltage
NOREVA 6	6W	600Lm	L132×W22×H60mm	DC48V
NOREVA 12	12W	1200Lm	L251×W22×H60mm	DC48V

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

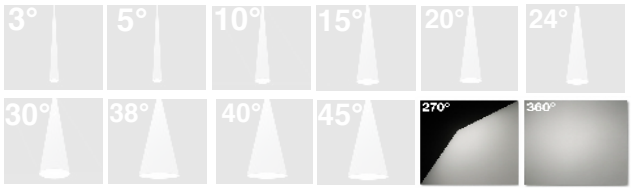

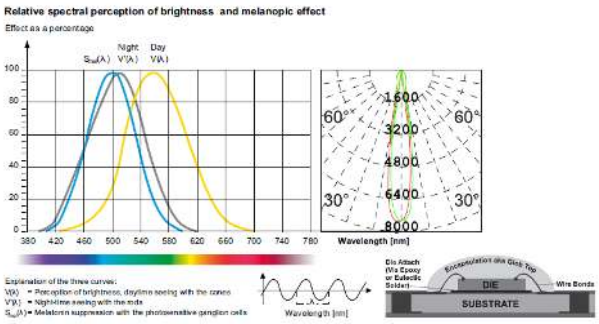

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP 20 IP 44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.