OLVETA

OLVETA Magnetic Tube Light presenta un design moderno e lineare che si integra perfettamente nei sistemi di illuminazione a binario magnetico, offrendo una luce uniforme e armoniosa. Il suo profilo tubolare elegante si abbina agli interni contemporanei, creando un effetto luminoso pulito e sofisticato. Adatto ad ambienti residenziali, commerciali, retail e hospitality.Combinando un'estetica minimalista con una funzionalità versatile, OLVETA offre una soluzione illuminotecnica raffinata per i moderni sistemi a binario magnetico.

OLVETA Magnetic Tube Light features a modern, streamlined design that integrates seamlessly into magnetic track lighting systems, delivering smooth and uniform illumination. Its elegant tubular profile complements contemporary interiors, creating a clean and sophisticated lighting effect. Suitable for residential, commercial, retail, and hospitality spaces. Combining minimalist aesthetics with versatile functionality, OLVETA provides a refined lighting solution for modern magnetic track systems.




Description


Housing -Die cast aluminium powder coated with choice of RAL colors
Diffuser - Tempered clear glass.
Reflector - Anodized aluminium reflector with optical PMMA refletor lens.
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722 Glowing wire Test 850°.

Model	Power	Illuminance	Size(mm)	Voltage
OLVETA 7	6W	700Lm	W35×H250mm	DC48V
OLVETA 12	12W	1200Lm	W45×H250mm	DC48V

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

k

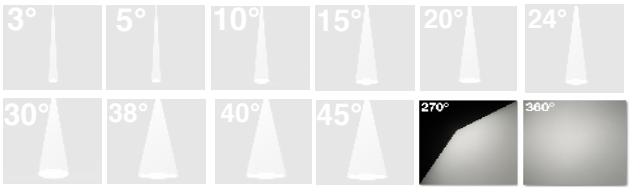

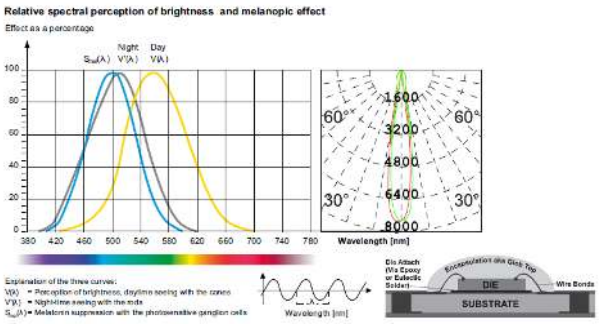

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP 20 IP 44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.