
ORLENA

ORLENA Magnetic Tube Light combina un design tubolare elegante con un'estetica moderna e minimalista, integrandosi perfettamente nei sistemi di illuminazione a binario magnetico. Il suo profilo raffinato crea un effetto luminoso armonioso, valorizzando gli ambienti contemporanei con uno stile pulito e sofisticato. Ideale per spazi residenziali, commerciali, retail e hospitality.Grazie al suo design versatile e alla sua eleganza discreta, ORLENA rappresenta una soluzione illuminotecnica moderna per progetti di illuminazione architettonica.



ORLENA Magnetic Tube Light combina un design tubolare elegante con un'estetica moderna e minimalista, integrandosi perfettamente nei sistemi di illuminazione a binario magnetico. Il suo profilo raffinato crea un effetto luminoso armonioso, valorizzando gli ambienti contemporanei con uno stile pulito e sofisticato. Ideale per spazi residenziali, commerciali, retail e hospitality.Grazie al suo design versatile e alla sua eleganza discreta, ORLENA rappresenta una soluzione illuminotecnica moderna per progetti di illuminazione architettonica.

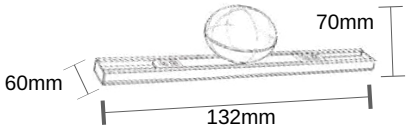


Description


Housing -Die cast aluminium powder coated with choice of RAL colors
Diffuser - Tempered clear glass.
Reflector - Anodized aluminium reflector with optical PMMA refletor lens.
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722 Glowing wire Test 850°.

Model	Power	Illuminance	Size(mm)	Voltage
ORLENA 5	5W	500Lm	L132×W60×H70mm	DC48V
ORLENA 10	2×5W	1000Lm	L251×W60×750mm	DC48V

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

k

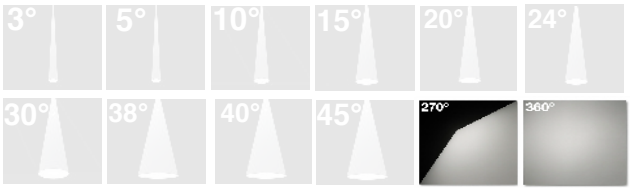

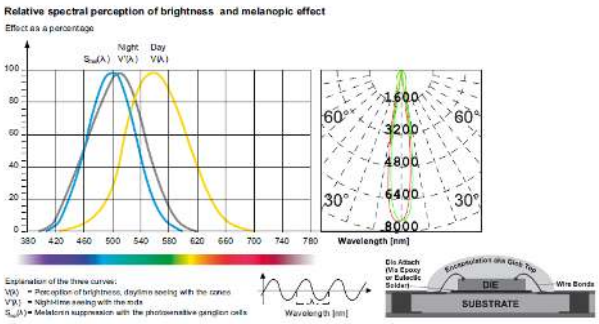

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP 20 IP 44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | ENERGY STAR | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.