
ORVIO

ORVIO Spot Light combina un design elegante e contemporaneo con un'illuminazione mirata, valorizzando l'estetica degli interni moderni. Il suo stile raffinato è ideale per mettere in risalto elementi architettonici, dettagli decorativi e aree specifiche. Adatto ad applicazioni residenziali, commerciali, retail e hospitality. Grazie al suo aspetto elegante e alle prestazioni illuminotecniche versatili, ORVIO offre una soluzione luminosa funzionale e di stile per i progetti contemporanei.



ORVIO Spot Light combines a sleek, contemporary design with focused illumination, enhancing the visual appeal of modern interiors. Its refined style makes it ideal for highlighting architectural features, decorative details, and selected areas. Suitable for residential, commercial, retail, and hospitality applications. With its elegant appearance and versatile lighting performance, ORVIO offers a stylish and functional solution for contemporary lighting projects.





Description

Housing -Die cast aluminium powder coated with choice of RAL colors
Diffuser - Tempered clear glass.
Reflector - Anodized aluminium reflector with optical PMMA refletor lens.
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722 Glowing wire Test 850°.

Model	Power	Illuminance	Size(mm)	Cutout
ORVIO 7	7W	700Lm	Ø60mm×H76mm	Ø55mm
ORVIO 12	12W	1200Lm	Ø82mm×H88mm	Ø75mm
ORVIO 18	18W	1800Lm	Ø110mm×H125mm	Ø95mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

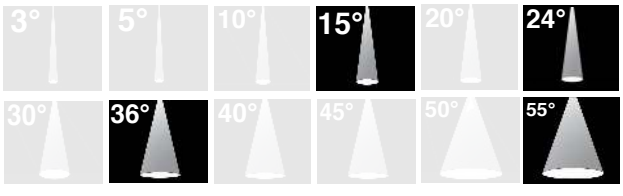

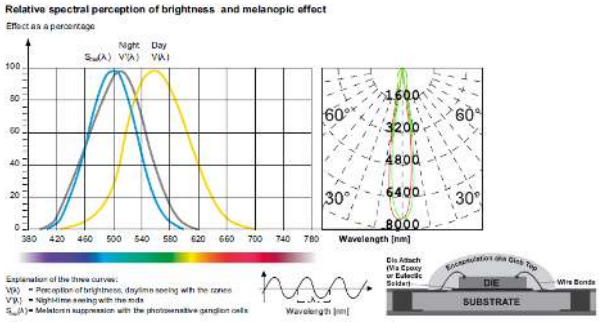

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP 44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE LM-79 TM-21 LM-80 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.