
OVARO

OVARO Spot Light combina un design moderno e raffinato con un'illuminazione mirata, creando un'atmosfera sofisticata negli interni contemporanei. Il suo aspetto pulito ed elegante lo rende ideale per l'illuminazione d'accento, per valorizzare elementi architettonici e dettagli decorativi. Adatto ad applicazioni residenziali, commerciali, retail e hospitality. Grazie al suo design versatile e alle prestazioni illuminotecniche funzionali, OVARO dona eleganza e valore estetico a diversi ambienti interni.



OVARO Spot Light combines a refined, modern design with focused illumination, creating a sophisticated atmosphere in contemporary interiors. Its clean and elegant appearance makes it ideal for accent lighting, highlighting architectural features, and enhancing decorative details. Suitable for residential, commercial, retail, and hospitality applications.With its versatile design and functional lighting performance, OVARO brings elegance and visual appeal to a variety of interior spaces.

Cutout





Description

Housing -Die cast aluminium powder coated with choice of RAL colors
Diffuser - Tempered clear glass.
Reflector - Anodized aluminium reflector with optical PMMA refletor lens.
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722 Glowing wire Test 850°.

Model	Power	Illuminance	Size(mm)	Cutout
OVARO 9	9W	900Lm	Ø85mm×85mm×H78mm	Ø75×75mm
OVARO 12	12W	1200Lm	Ø105mm×H120mm	Ø75×75mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

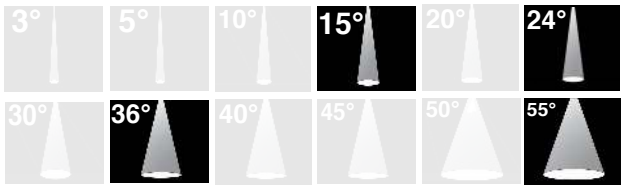

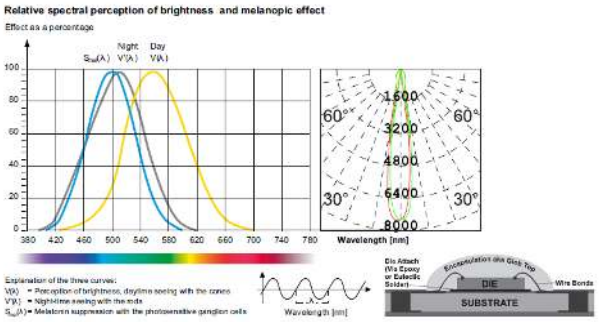

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP 44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE LM-79 TM-21 LM-80 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.