
PERLA

PERLA è un paletto luminoso architettonico contemporaneo per esterni caratterizzato da una pulita struttura a pilastro rettangolare con una finestra di illuminazione superiore aperta e supportata da montanti per un'illuminazione verso il basso. Costruito con una robusta struttura in alluminio e una finitura a polvere Tiger di alta qualità per una resistenza superiore agli agenti atmosferici e una lunga durata.

PERLA is a contemporary architectural outdoor bollard light featuring a clean rectangular pillar structure with an open, pillar-supported upper lighting window for downward illumination. Built with a robust aluminum structure and a premium Tiger powder coating for superior weather resistance and durability.





Description


Housing - Robust aluminum structure with a premium Tiger powder coating for superior outdoor protection.
Diffuser - Clear recessed protective lens positioned beneath the upper cap for uniform downward light distribution.
Reflector - Precision beam control (120°).
LED - Sustainable energy savings enabled by advanced LED technology (Efficiency: 100 Lm/W, UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h, Ta -20°C ~ 50°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722, Glowing Wire Test 850°

Model	Power	Illuminance	Size(mm)
PERLA-10	10W	1000Lm	107-111-600mm
PERLA-15	15W	1500Lm	150-210-800mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

k



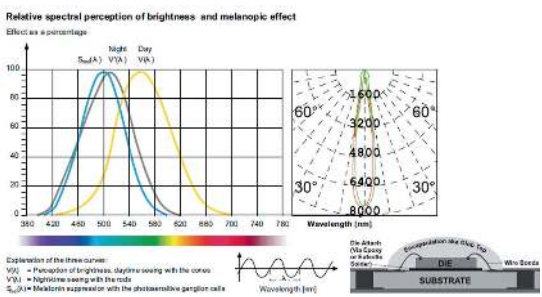

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP66 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.