PFL200


Il proiettore LED PFL 200 offre un'illuminazione potente e uniforme per applicazioni esterne, industriali, commerciali e architettoniche. La struttura robusta garantisce elevata efficienza, prestazioni affidabili, ottima resistenza e lunga durata anche negli ambienti più impegnativi.



PFL 200 LED Flood Light delivers powerful, uniform illumination for outdoor, industrial, commercial, and architectural applications. Its robust construction ensures high efficiency, reliable performance, excellent durability, and long-lasting operation in demanding environments.

Description


Housing -Die cast aluminium powder coated with choice of RAL colors
Diffuser - Tempered clear glass.
Reflector - Anodized aluminium reflector with optical PMMA refletor lens.
LED - sustainable energy savings enabled by advanced LED technogy
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722

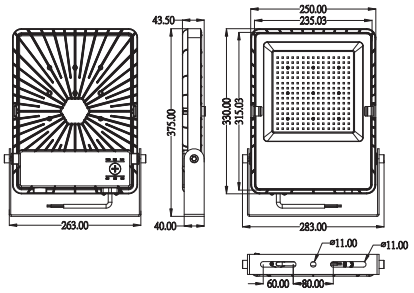


Model	Power	Illuminance	Size(mm)
PFL 200	200W	30000Lm	L375×W263×H43.5mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K

k

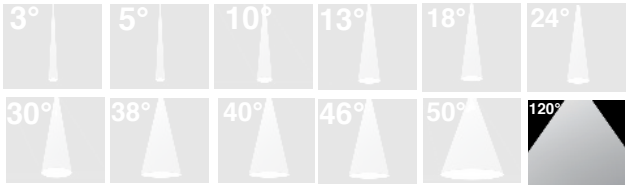

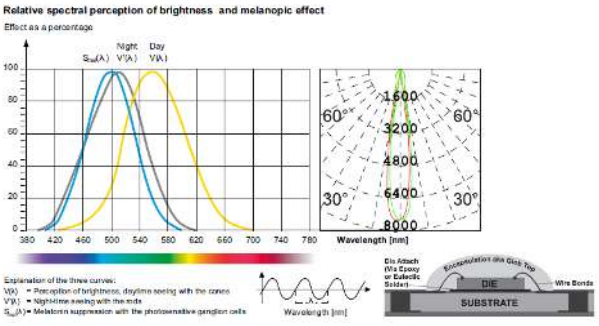

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP65 | IK09 | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 150 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | ENERGY STAR | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.