
FLOOD LIGHT

PFL400

Il proiettore LED PFL 400 offre un'illuminazione potente e ampia con un'eccellente distribuzione della luce, ideale per applicazioni industriali, commerciali, architettoniche ed esterne. La struttura robusta garantisce elevata efficienza, prestazioni affidabili e lunga durata anche negli ambienti più impegnativi.



PFL 400 LED Flood Light delivers powerful, wide-area illumination with excellent light distribution, ideal for industrial, commercial, architectural, and outdoor applications. Its robust construction ensures high efficiency, reliable performance, and long-lasting durability in demanding environments.

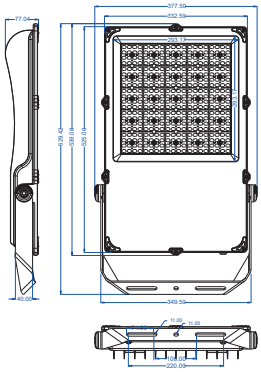


Description


Housing -Die cast aluminium powder coated with choice of RAL colors
Diffuser - Tempered clear glass.
Reflector - Anodized aluminium reflector with optical PMMA refletor lens.
LED - sustainable energy savings enabled by advanced LED technogy
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722

Model	Power	Illuminance	Size(mm)
PFL 400	400W	60000Lm	L629.42×W377.5×H77.04mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K

k

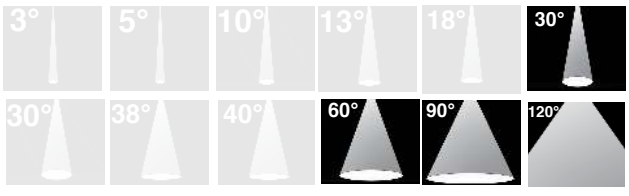

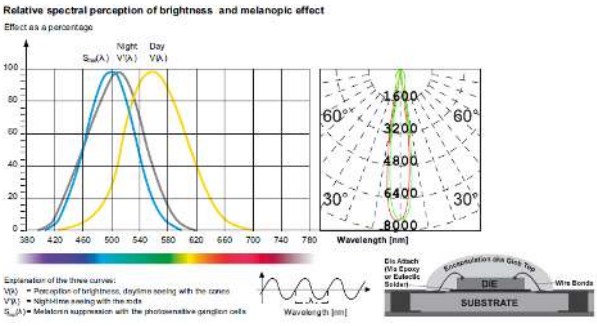

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP65 | IK09 | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 150 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | ENERGY STAR | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.