

PLASTER RO

PLASTER RO Spot Light si distingue per il suo design senza cornice, che si integra perfettamente nel soffitto creando un effetto minimalista ed elegante. Ideale per un'illuminazione discreta e mirata, valorizza i dettagli architettonici e gli ambienti contemporanei. Adatto ad applicazioni residenziali, commerciali, retail e hospitality. Grazie al suo design essenziale e alla perfetta integrazione nel soffitto, PLASTER RO offre una soluzione illuminotecnica raffinata e funzionale.

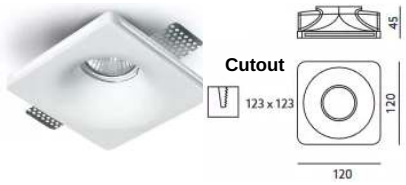

PLASTER RO Spot Light si distingue per il suo design trimless, che si integra perfettamente nel soffitto creando un effetto minimalista ed elegante. Ideale per un'illuminazione discreta e mirata, valorizza dettagli architettonici e ambienti contemporanei. Adatto ad applicazioni residenziali, commerciali, retail e hospitality. Grazie al suo design essenziale e alla perfetta integrazione architettonica, PLASTER RO offre una soluzione illuminotecnica raffinata e funzionale.

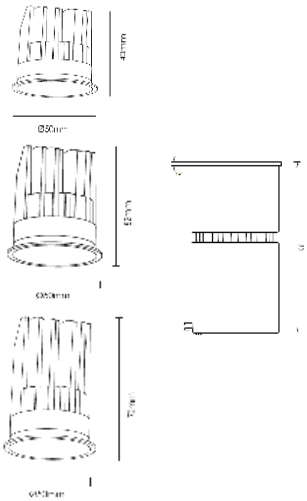



Description

Housing -Die cast aluminium powder coated with choice of RAL colors
Diffuser - Tempered clear glass.
Reflector - Anodized aluminium reflector with optical PMMA refletor lens.
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722 Glowing wire Test 850°.

Model	Power	Illuminance	Size(mm)	Cutout
PLASTER RO 5	5W	500Lm	Ø95-76mm	123×123mm
PLASTER RO 12	12W	1200Lm	Ø95-94mm	123×123mm
PLASTER RO 18	18W	1800Lm	Ø95-109mm	123×123mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

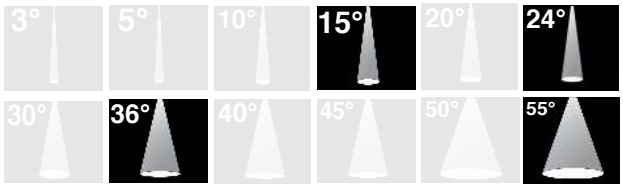

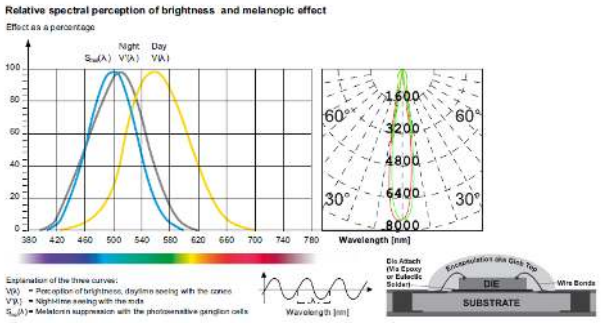

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC LIGHTING SOLUTIONS

LED | IP20 IP44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE LM-79 TM-21 LM-80 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.