

PLASTER SQ

PLASTER SQ Spot Light presenta un design squadrato e senza cornice, che si integra perfettamente nel soffitto creando un effetto pulito e minimalista. La sua illuminazione discreta e mirata valorizza i dettagli architettonici, mantenendo un'estetica raffinata e armoniosa. Ideale per applicazioni residenziali, commerciali, retail e hospitality. Combinando un design elegante con una perfetta integrazione nel soffitto, PLASTER SQ offre una soluzione illuminotecnica sofisticata e funzionale per gli interni contemporanei.

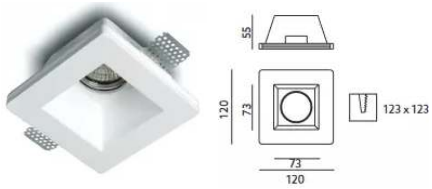

PLASTER SQ Spot Light features a sleek, trimless design that integrates seamlessly into the ceiling, creating a clean and minimalist appearance. Its discreet and focused illumination enhances architectural details while maintaining a refined and uncluttered aesthetic. Ideal for residential, commercial, retail, and hospitality applications. Combining elegant design with seamless ceiling integration, PLASTER SQ delivers a sophisticated and functional lighting solution for contemporary interiors.

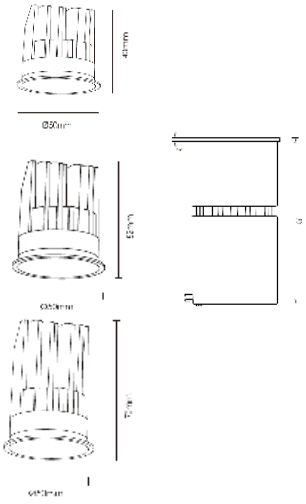


Description


Housing -Die cast aluminium powder coated with choice of RAL colors
Diffuser - Tempered clear glass.
Reflector - Anodized aluminium reflector with optical PMMA refletor lens.
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722 Glowing wire Test 850°.

Model	Power	Illuminance	Size(mm)	Cutout
PLASTER SQ 5	5W	500Lm	Ø95-76mm	123×123mm
PLASTER SQ 12	12W	1200Lm	Ø95-94mm	123×123mm
PLASTER SQ 18	18W	1800Lm	Ø95-109mm	123×123mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

k

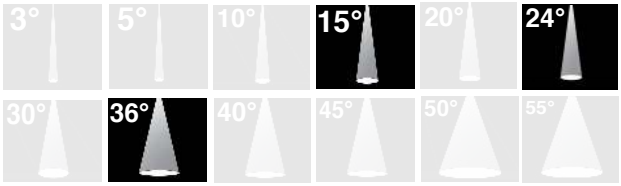

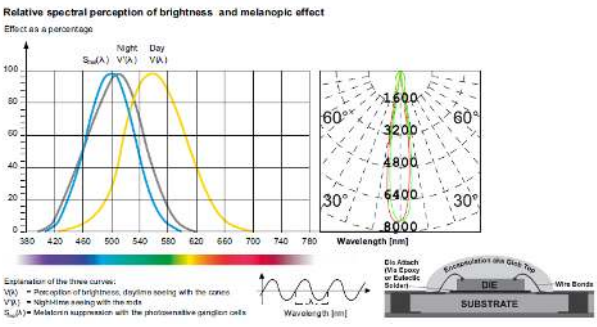

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP20 IP44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | ENERGY STAR | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.