
PRIMI

PRIMI Spot Light combina un design contemporaneo e raffinato con linee essenziali, offrendo una soluzione luminosa elegante per gli interni moderni. Progettato per creare accenti luminosi mirati, valorizza dettagli architettonici, elementi decorativi e aree specifiche, contribuendo a definire atmosfere suggestive e armoniose. Ideale per ambienti residenziali, commerciali, retail e hospitality.Grazie alla sua estetica minimalista e alla sua versatilità, PRIMI Spot Light si integra perfettamente nei progetti di illuminazione architettonica, unendo funzionalità ed eleganza.

PRIMI Spot Light combina un design contemporaneo e raffinato con linee essenziali, offrendo una soluzione luminosa elegante per gli interni moderni.Progettato per creare accenti luminosi mirati, valorizza dettagli architettonici, elementi decorativi e aree specifiche, contribuendo a definire atmosfere suggestive e armoniose. Ideale per ambienti residenziali, commerciali, retail e hospitality.Grazie alla sua estetica minimalista e alla sua versatilità, PRIMI Spot Light si integra perfettamente nei progetti di illuminazione architettonica, unendo funzionalità ed eleganza.







Description

Housing -Die cast aluminium powder coated with choice of RAL colors
Diffuser - Tempered clear glass.
Reflector - Anodized aluminium reflector with optical PMMA refletor lens.
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722 Glowing wire Test 850°.

Model	Power	Illuminance	Size(mm)
PRIMI 48	48W	4800Lm	ØL565×W76.5mm×H1.2mm
PRIMI 60	60W	6000Lm	ØL1165×W76.5mm×H1.2mm
PRIMI 72	72W	7200Lm	ØL1465×W76.5mm×H1.2mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

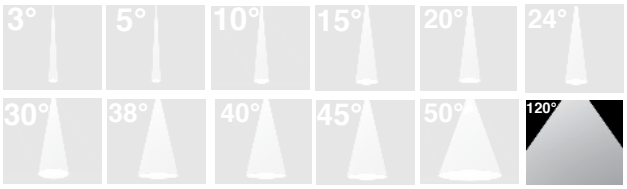

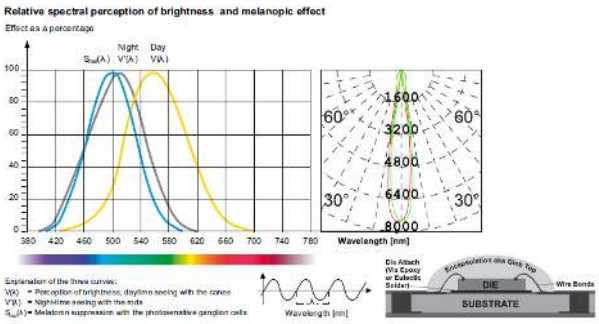

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP 65 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE LM-79 TM-21 LM-80 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.