
RIO

RIO presenta un design cilindrico ed elegante per montaggio a superficie, progettato per applicazioni architettoniche moderne. Realizzato con ottiche ad alte prestazioni, offre un controllo costante del posizionamento, un controllo anti-abbagliamento con incasso profondo e un'illuminazione affidabile, garantendo un profilo a soffitto snello e un comfort visivo superiore per ambienti contemporanei.

RIO features a sleek, surface-mounted cylindrical design engineered for modern architectural applications. Crafted with high-performance optics, it offers steady positioning control, deep-recessed anti-glare control, and reliable illumination—delivering a streamlined ceiling profile and superior visual comfort for contemporary environments.






Description


Housing - High-pressure die-cast aluminium housing with solvent-free double anti-corrosion powder coating (White, Rose Gold, Matte Black, Gun Black, Silver, Gold). Designed for surface-mounted installation.
Diffuser - Deep-recessed optical lens.
Reflector - Anodized aluminum with precision beam control (15°/24°/36°/55°).
LED - Sustainable energy savings enabled by advanced LED technology (Efficiency: 100 Lm/W, UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h, Ta -20°C ~ 50°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722, Glowing Wire Test 850°

Model	Power	Illuminance	Size(mm)
RIO RI9001	9W	900Lm	Ø74-100mm
RIO RI10001	10W	1000Lm	Ø72-95mm
RIO RI15001	15W	1500Lm	Ø94-117mm
RIO RI20001	24W	2400Lm	Ø119-137mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

k

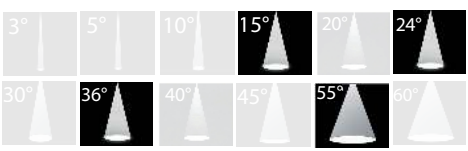

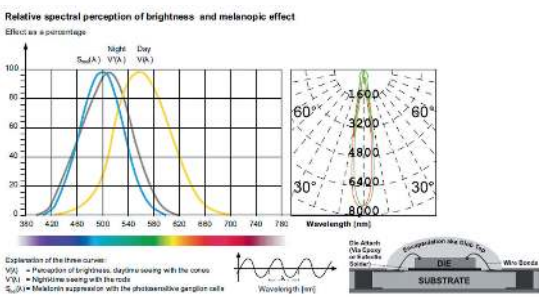

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP65 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.