
# RITMO



RITMO Spot Light offre un'illuminazione precisa e direzionata, con un design elegante e contemporaneo. Le sue versatili caratteristiche illuminotecniche valorizzano i dettagli architettonici e creano effetti luminosi equilibrati e suggestivi. Ideale per applicazioni architettoniche, commerciali, retail, hospitality e residenziali. Combinando estetica moderna, prestazioni affidabili e illuminazione efficiente, RITMO trasforma ogni ambiente con una luce elegante e funzionale.

RITMO Spot Light offers precise and focused illumination with a stylish, contemporary design. Its versatile lighting capabilities enhance architectural details and create balanced, visually appealing lighting effects. Ideal for architectural, commercial, retail, hospitality, and residential applications. Combining modern aesthetics, reliable performance, and efficient illumination, RITMO transforms every space with elegant and functional lighting.





## Description


**Housing** -Die cast aluminium powder coated with choice of RAL colors
**Diffuser -** Tempered clear glass.
**Reflector -** Anodized aluminium reflector with optical PMMA refletor lens.
**LED -** sustainable energy savings enabled by advanced LED technogy
L80 / B10 @ 50,000 h (LM-80 / TM-21 )
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
**Standards -** Manufactured in accordance with tested as per PTPS IES 62722
Glowing Wire Test 850°

| Model | Power | Illuminance | Cutout | Lamp Body Size(mm) |
|---|---|---|---|---|
| RITMO 9 | 9W | 900Lm | L75×W75mm | Ø52×100mm×H145mm |

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K

k

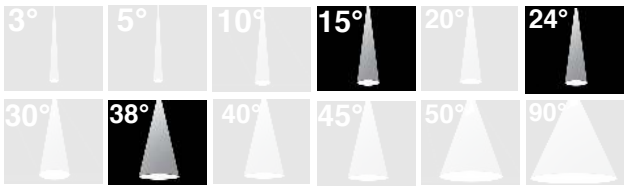

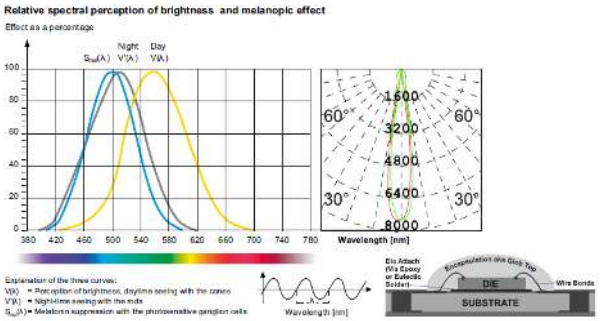
CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP 44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE LM-79 TM-21 LM-80 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.