
RIVA

La lampada da parete per esterni RIVA combina la semplicità moderna con un'eleganza senza tempo, offrendo una soluzione illuminotecnica sofisticata per gli spazi esterni contemporanei. Il suo design raffinato valorizza i dettagli architettonici e crea un'atmosfera accogliente in ingressi, balconi, terrazze, muri da giardino, vialetti e facciate degli edifici. Ideale per ambienti residenziali, commerciali e ricettivi, RIVA si integra armoniosamente con diversi stili architettonici, aggiungendo eleganza e funzionalità ai progetti di illuminazione per esterni.



The RIVA Outdoor Wall Light combines modern simplicity with timeless elegance, creating a sophisticated lighting solution for contemporary exterior spaces. Its refined design enhances architectural details while providing a welcoming atmosphere for entrances, balconies, terraces, garden walls, pathways, and building facades. Suitable for residential, commercial, and hospitality environments, RIVA complements a variety of architectural styles, adding elegance and functionality to outdoor lighting projects.

Description





Housing - High-grade aluminium construction with tiger powder spraying surface teatment. engineered for superior outdoor durability and corrosion resistance.
Diffuser - High-transmittance optical diffuser with a precision-angled reflector for glare-free distribution.
Reflector - Precision beam control (15°.25°/36°/50°).
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES62722 , Glowing Wire Test 850°.

Model	Power	Illuminance	Size(mm)
RIVA	15W	1500Lm	75mm×130mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K

k

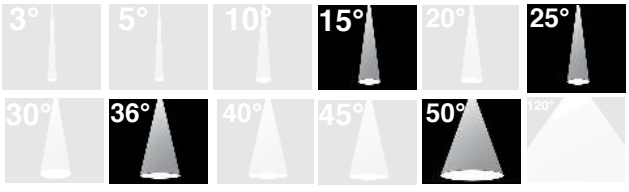

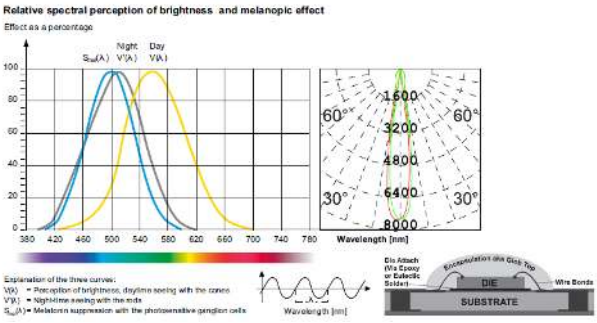

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP 66 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

IK08 | CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE LM-79 TM-21 LM-80 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.