
ROVELA

ROVELA Magnetic Tube Light unisce un design tubolare raffinato a un'estetica contemporanea e minimalista, integrandosi armoniosamente nei sistemi di illuminazione a binario magnetico. La sua forma elegante contribuisce a creare un'illuminazione uniforme e un'atmosfera sofisticata, valorizzando gli spazi moderni. Ideale per ambienti residenziali, commerciali, retail e hospitality. Grazie al suo design versatile e alla sua estetica essenziale, ROVELA rappresenta una soluzione illuminotecnica elegante per progetti architettonici contemporanei.



ROVELA Magnetic Tube Light unisce un design tubolare raffinato a un'estetica contemporanea e minimalista, integrandosi armoniosamente nei sistemi di illuminazione a binario magnetico. La sua forma elegante contribuisce a creare un'illuminazione uniforme e un'atmosfera sofisticata, valorizzando gli spazi moderni. Ideale per ambienti residenziali, commerciali, retail e hospitality. Grazie al suo design versatile e alla sua estetica essenziale, ROVELA rappresenta una soluzione illuminotecnica elegante per progetti architettonici contemporanei.





Description

Housing -Die cast aluminium powder coated with choice of RAL colors
Diffuser - Tempered clear glass.
Reflector - Anodized aluminium reflector with optical PMMA refletor lens.
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722 Glowing wire Test 850°.

Model	Power	Illuminance	Size(mm)	Voltage
ROVELA 7	7W	700Lm	L132×W60×H70mm	DC48V
ROVELA 17	2×7W	1400Lm	L251×W60×750mm	DC48V

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

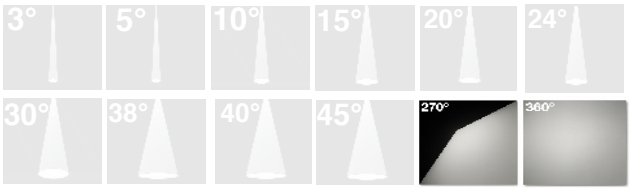

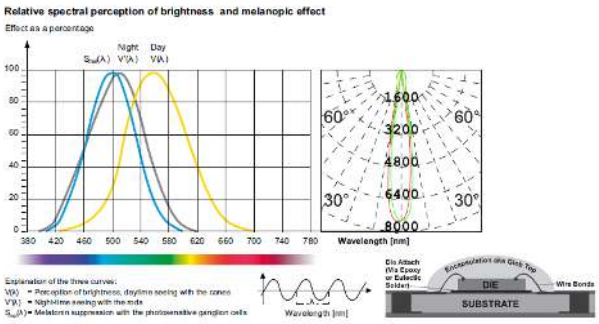

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP 20 IP 44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.