
# ROVIA

ROVIA Spot Light combina un design moderno ed elegante con un'illuminazione mirata, creando un'atmosfera raffinata negli interni contemporanei. Il suo aspetto essenziale lo rende ideale per l'illuminazione d'accento, per valorizzare elementi architettonici e dettagli decorativi. Adatto ad applicazioni residenziali, commerciali, retail e hospitality. Grazie al suo design versatile e alle prestazioni illuminotecniche funzionali, ROVIA offre una soluzione luminosa sofisticata per diversi ambienti interni.




**Cutout**
Ø55×55mm



ROVIA Spot Light combines a modern, elegant design with focused illumination, creating a refined atmosphere in contemporary interiors. Its sleek appearance makes it ideal for accent lighting, highlighting architectural features, and enhancing decorative details. Suitable for residential, commercial, retail, and hospitality applications. With its versatile design and functional lighting performance, ROVIA delivers a sophisticated lighting solution for a variety of interior spaces.



**Cutout**
Ø75×75mm





## Description

**Housing** -Die cast aluminium powder coated with choice of RAL colors
**Diffuser -** Tempered clear glass.
**Reflector -** Anodized aluminium reflector with optical PMMA refletor lens.
**LED -** sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21 )
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
**Standards -** Manufactured in accordance with tested as per PTPS IES 62722 Glowing wire Test 850°.

| Model | Power | Illuminance | Size(mm) | Cutout |
|---|---|---|---|---|
| ROVIA 1×7 | 7W | 700Lm | Ø62mm×62mm×H76mm | Ø55×55mm |
| ROVIA 1×12 | 12W | 1200Lm | Ø85mm×85mm×H88mm | Ø75×75mm |
| ROVIA 2×7 | 14W | 1400Lm | Ø105mm×62mm×H76mm | Ø105×55mm |
| ROVIA 2×12 | 24W | 2400Lm | Ø157mm×85mm×H88mm | Ø148×75mm |

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

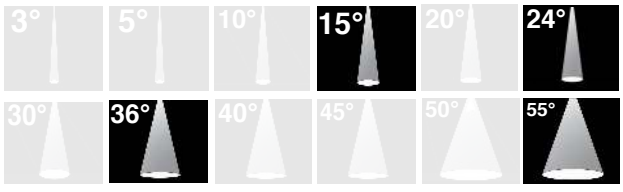

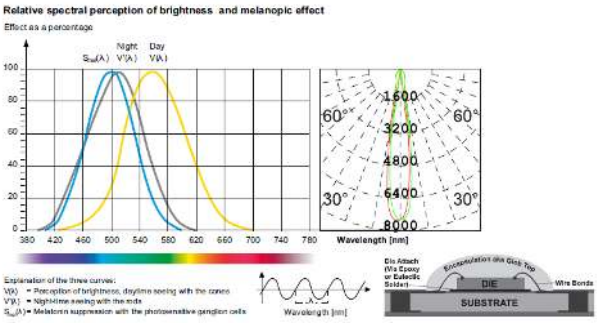
CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP 44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.