
ROVINO

ROVINO Magnetic Tube Light combina un design tubolare moderno con linee pulite ed essenziali, integrandosi perfettamente nei sistemi di illuminazione a binario magnetico. Il suo aspetto raffinato valorizza gli interni contemporanei, contribuendo a creare un'atmosfera luminosa armoniosa ed elegante. Ideale per ambienti residenziali, commerciali, retail e hospitality. Grazie al suo design versatile e minimalista, ROVINO offre una soluzione illuminotecnica sofisticata per progetti di illuminazione architettonica moderna.

ROVINO Magnetic Tube Light combina un design tubolare moderno con linee pulite ed essenziali, integrandosi perfettamente nei sistemi di illuminazione a binario magnetico. Il suo aspetto raffinato valorizza gli interni contemporanei, contribuendo a creare un'atmosfera luminosa armoniosa ed elegante. Ideale per ambienti residenziali, commerciali, retail e hospitality. Grazie al suo design versatile e minimalista, ROVINO offre una soluzione illuminotecnica sofisticata per progetti di illuminazione architettonica moderna.

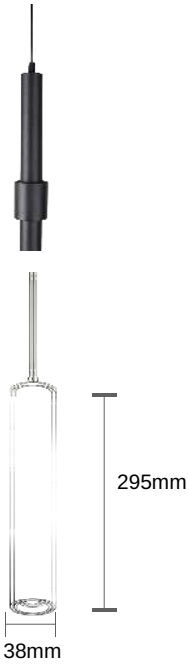


Description


Housing -Die cast aluminium powder coated with choice of RAL colors
Diffuser - Tempered clear glass.
Reflector - Anodized aluminium reflector with optical PMMA refletor lens.
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722 Glowing wire Test 850°.

Model	Power	Illuminance	Size(mm)	Voltage
ROVINO	7W	700Lm	W38×H295mm	DC48V

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

k

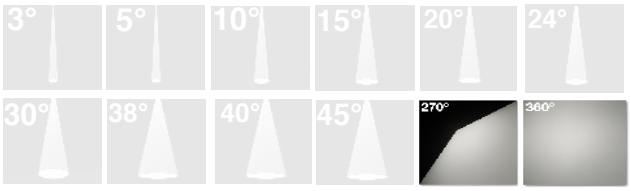

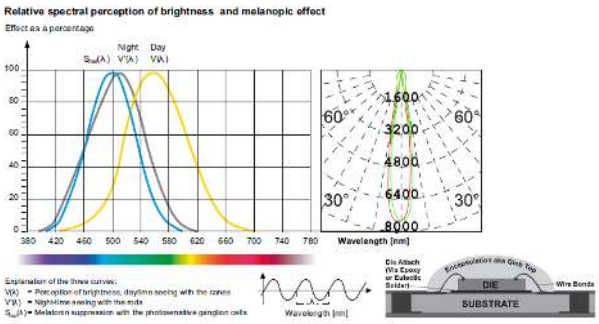

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC LIGHTING SOLUTIONS

LED | IP 20 IP 44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | | | COMPLIANCE LM-79 TM-21 LM-80 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.