

SELIO

SELIO Spot Light combina un design raffinato e contemporaneo con un'illuminazione mirata, donando eleganza e comfort visivo agli interni moderni. Il suo aspetto pulito e sofisticato lo rende ideale per l'illuminazione d'accento, per valorizzare elementi architettonici e dettagli decorativi. Adatto ad applicazioni residenziali, commerciali, retail e hospitality. Grazie al suo design versatile e alle prestazioni illuminotecniche funzionali, SELIO offre una soluzione luminosa elegante e pratica per gli spazi contemporanei.

SELIO Spot Light combines a refined, contemporary design with focused illumination, bringing elegance and visual comfort to modern interiors. Its clean and sophisticated appearance makes it ideal for accent lighting, highlighting architectural features, and enhancing decorative elements. Suitable for residential, commercial, retail, and hospitality applications. With its versatile design and functional lighting performance, SELIO offers an elegant and practical lighting solution for contemporary spaces.







Description

Housing -Die cast aluminium powder coated with choice of RAL colors
Diffuser - Tempered clear glass.
Reflector - Anodized aluminium reflector with optical PMMA refletor lens.
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722 Glowing wire Test 850°.

Model	Power	Illuminance	Size(mm)	Cutout
SELIO 1×7	7W	700Lm	Ø75mm×75mm×H76mm	Ø55×55mm
SELIO 1×12	12W	1200Lm	Ø113mm×113mm×H88mm	Ø75×75mm
SELIO 2×7	14W	1400Lm	Ø125mm×75mm×H76mm	Ø105×55mm
SELIO 2×12	24W	2400Lm	Ø185mm×105mm×H88mm	Ø148×75mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

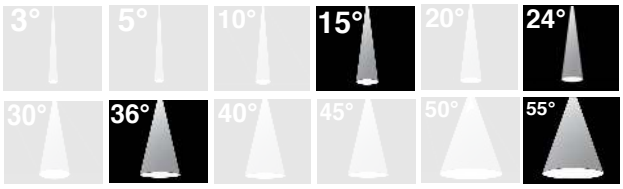

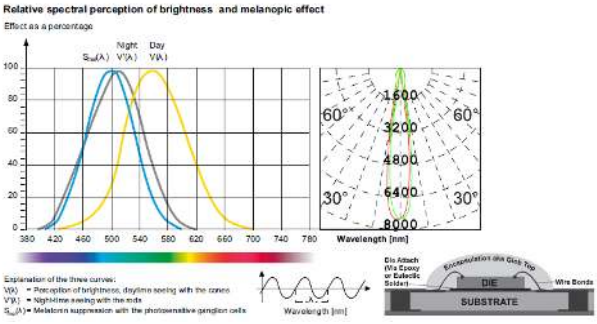

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP 44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.