
SELVIA

La lampada da parete per esterni SELVIA combina la raffinatezza contemporanea con un design elegante e lineare, rendendola una soluzione illuminotecnica ideale per gli spazi esterni moderni. Il suo aspetto ricercato valorizza i dettagli architettonici e crea un'atmosfera calda e accogliente in ingressi, balconi, terrazze, muri da giardino, vialetti e facciate degli edifici. Adatta ad ambienti residenziali, commerciali e ricettivi, SELVIA si integra armoniosamente con diversi stili architettonici, aggiungendo eleganza e funzionalità ai progetti di illuminazione per esterni.



The SELVIA Outdoor Wall Light combines contemporary sophistication with a sleek, elegant design, making it an ideal lighting solution for modern exterior spaces. Its refined appearance enhances architectural details while creating a warm and welcoming atmosphere in entrances, balconies, terraces, garden walls, pathways, and building facades. Suitable for residential, commercial, and hospitality environments, SELVIA blends harmoniously with a variety of architectural styles, bringing elegance and functionality to outdoor lighting projects.




Description

Housing - High-grade aluminium construction with tiger powder spraying surface teatment.
engineered for superior outdoor durability and corrosion resistance.
Diffuser - High-transmittance optical diffuser with a precision-angled reflector for glare-free distribution.
Reflector - Precision beam control (Asymmetric).
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES62722 , Glowing Wire Test 850°.

Model	Power	Illuminance	Size(mm)
SELVIA	11W	1100Lm	310mm×65mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K

k

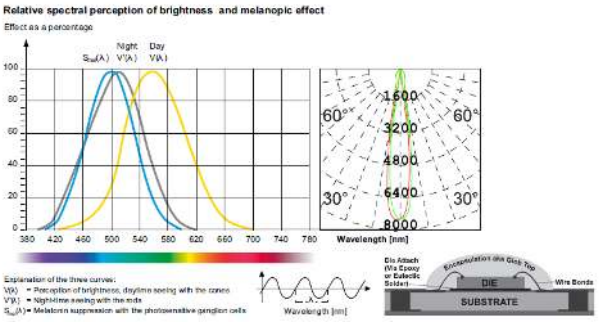

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP 66 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

IK08 | CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE LM-79 TM-21 LM-80 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.