
SINO SQ TL

SINO SQ TL presenta un elegante anello frontale quadrato con bordo da incasso fisso o un anello frontale regolabile fisso da incasso, progettato per applicazioni architettoniche moderne. Realizzato con ottiche di precisione ad alte prestazioni, offre un controllo costante del posizionamento, un'illuminazione confortevole anti-abbagliamento e prestazioni affidabili, garantendo un profilo a soffitto continuo e un comfort visivo superiore per ambienti contemporanei.

SINO SQ TL features a sleek, square trimmed fixed embedded face ring or fixed embedded adjustable face ring engineered for modern architectural applications. Crafted with high-performance precision optics, it offers steady positioning control, comfortable anti-glare illumination, and reliable performance—delivering a seamless ceiling profile and superior visual comfort for contemporary environments.




Cutout Ø55-55mm





Cutout Ø105-55mm




Description


Housing - Die-cast aluminium with anti-corrosion powder coating (matte white, matte black, gun black, bright silver). Designed for square trimmed recessed installation with an adjustable irradiation method.
Diffuser - Deep-recessed polycarbonate lens.
Reflector - Anodized aluminum with precision beam control (15°, 24°, 36°, 55°).
LED - Sustainable energy savings enabled by advanced LED technology (Efficiency: 100 Lm/W, UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h, Ta -20°C ~ 50°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722, Glowing Wire Test 850°

Model	Power	Illuminance	Size(mm)	Cutout
SINO SQ TL	1 x 7W	700Lm	Ø75-75-76mm	Ø55-55mm
SINO SQ TL	1 x 12W	1200Lm	Ø113-113-88mm	Ø75-75mm
SINO SQ DL TL WH	2 x 7W	1400Lm	Ø126-75-76mm	Ø105-55mm
SINO SQ DL TL WH	2 x 12W	2400Lm	Ø185-105-88mm	Ø148-75mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

k

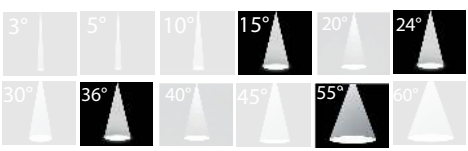

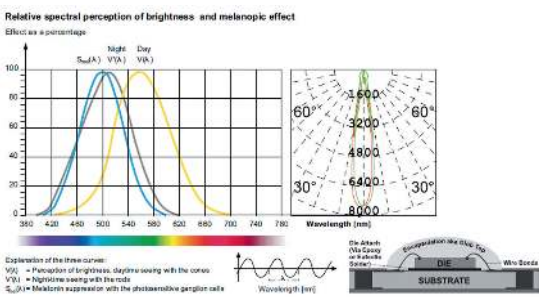

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP20 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.