SIRIO

SIRIO presenta un design quadrato da incasso orientabile ed elegante, progettato con ottiche di precisione ad alte prestazioni per applicazioni architettoniche moderne. Offre un'illuminazione direzionale flessibile, un controllo anti-abbagliamento con incasso profondo e prestazioni affidabili, garantendo un'illuminazione d'accento dinamica e un comfort visivo superiore per ambienti contemporanei.

SIRIO features a sleek, adjustable square recessed design engineered with high-performance precision optics for modern architectural applications. It offers flexible directional illumination, deep-recessed anti-glare control, and reliable performance—delivering dynamic accent lighting with superior visual comfort for contemporary environments.




Cutout Ø62-37mm






Cutout Ø143-37mm





Cutout Ø278-37mm




Description


Housing - High-pressure die-cast aluminium housing with solvent-free double anti-corrosion powder coating. Designed for adjustable square recessed installation.
Diffuser - Deep-recessed optical lens.
Reflector - Anodized aluminum with precision beam control (15°, 24°, 36°).
LED - Sustainable energy savings enabled by advanced LED technology (Efficiency: 100 Lm/W, UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h, Ta -20°C ~ 50°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722, Glowing Wire Test 850°

Model	Power	Illuminance	Size(mm)	Cutout
SIRIO-3	3W	300Lm	Ø69-45-60mm	Ø62-37mm
SIRIO-9	9W	900Lm	Ø150-45-60mm	Ø143-37mm
SIRIO-17	17W	1700Lm	Ø285-45-60mm	Ø278-37mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

k

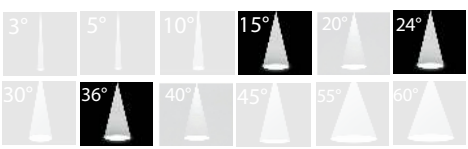

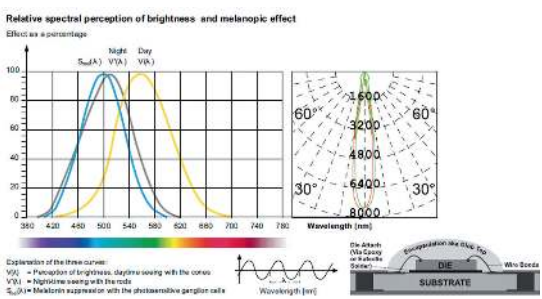

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP65 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.