
SPLEN

SPLEN presenta un design quadrato da incasso compatto ed elegante, progettato con ottiche di precisione ad alte prestazioni per applicazioni architettoniche moderne. Offre un'illuminazione direzionale focalizzata, un controllo anti-abbagliamento con incasso profondo e prestazioni affidabili, garantendo un'illuminazione d'accento pulita con un comfort visivo superiore per ambienti contemporanei.

SPLEN features a sleek, compact square recessed design engineered with high-performance precision optics for modern architectural applications. It offers focused directional illumination, deep-recessed anti-glare control, and reliable performance—delivering clean accent lighting with superior visual comfort for contemporary environments.




Cutout Ø39-39mm






Cutout Ø62-37mm




Cutout Ø90-37mm





Cutout Ø142-37mm






Description


Housing - High-pressure die-cast aluminium housing with solvent-free double anti-corrosion powder coating. Designed for compact square recessed installation.
Diffuser - Deep-recessed optical lens.
Reflector - Anodized aluminum with precision beam control (15°, 24°, 36°).
LED - Sustainable energy savings enabled by advanced LED technology (Efficiency: 100 Lm/W, UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h, Ta -20°C ~ 50°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722, Glowing Wire Test 850°

Model	Power	Illuminance	Size(mm)	Cutout
SPLEN-3	3W	300Lm	Ø45-45-60mm	Ø39-39mm
SPLEN-6	6W	600Lm	Ø69-45-60mm	Ø62-37mm
SPLEN-9	9W	900Lm	Ø96-45-60mm	Ø90-37mm
SPLEN-13	13W	1300Lm	Ø150-45-60mm	Ø142-37mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

k

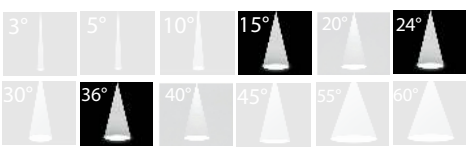

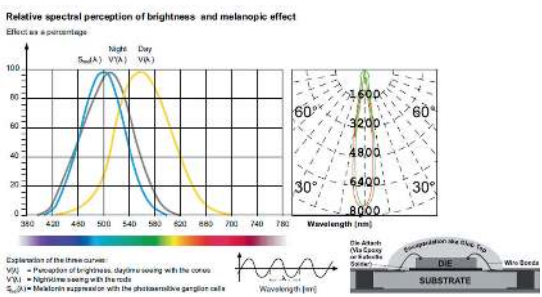

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC LIGHTING SOLUTIONS

LED | IP65 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.