
TERALI

TERALI è un faretto da esterno architettonico multi-direzionale progettato per l'illuminazione paesaggistica avanzata, la complessa illuminazione di alberi e la valorizzazione di facciate. Caratterizzato da un movimento a doppio asse completamente regolabile (rotazione a 360° e angoli di inclinazione) su più varianti di dimensioni della testa, offre un'illuminazione versatile e ad alta efficienza con eccezionale resistenza agli agenti atmosferici e robusta durata strutturale.

TERALI is a multi-directional architectural outdoor spotlight engineered for advanced landscape lighting, complex tree illumination, and facade accentuation. Featuring fully adjustable dual-axis movement (360° rotation and tilting angles) across multiple head size variants, it provides versatile, high-efficiency illumination with exceptional weather resistance and robust structural durability.




Description


Housing - High-grade aluminum construction with Tiger powder spraying surface treatment. Designed for outdoor adjustable installation
Diffuser - High-performance optical lens with precise beam control.
Reflector - Precision beam control (15°, 25°, 36°, 50°).
LED - Sustainable energy savings enabled by advanced LED technology (Efficiency: 100 Lm/W, UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h, Ta -20°C ~ 50°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722, Glowing Wire Test 850°

Model	Power	Illuminance	Size(mm)
TERALI-10	10W	1000Lm	Ø40-Ø20-75mm
TERALI-15	15W	1500Lm	Ø60-Ø20-96mm
TERALI-25	25W	2500Lm	Ø80-Ø25-121mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

k

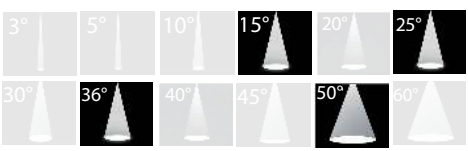

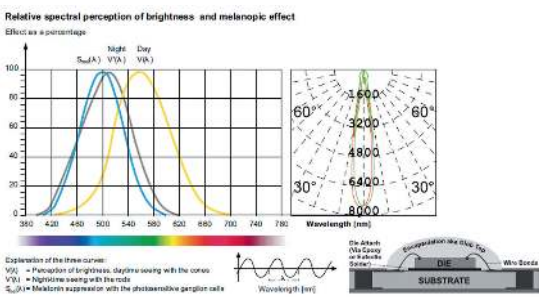

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP66 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.