
# UVERIS



UVERIS è un faretto da esterno architettonico ad alte prestazioni progettato per un'illuminazione d'accento di precisione montata su superficie su facciate di edifici, colonne e punti di riferimento architettonici. Caratterizzato da una flessibile regolabilità multiasse, una robusta protezione dagli agenti atmosferici e molteplici varianti di distribuzione del fascio ottico, offre un'illuminazione affidabile e pulita su misura per ambienti esterni sofisticati.

UVERIS is a high-performance architectural outdoor spotlight engineered for precision surface-mounted accent lighting on building facades, columns, and architectural landmarks. Featuring flexible multi-axis adjustability, robust weather protection, and multiple optical beam distribution variants, it delivers reliable, clean illumination tailored for sophisticated exterior environments.





## Description


**Housing -** High-grade aluminum construction with Tiger powder spraying surface treatment. Designed for outdoor surface-mounted adjustable installation
**Diffuser -** High-performance optical lens with precise beam control.
**Reflector -** Precision beam control (5°, 8°, 15°, 25°, 36°, 50°) Elliptical light.
**LED** - Sustainable energy savings enabled by advanced LED technology (Efficiency: 100 Lm/W, UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h, Ta -20°C ~ 50°C
**Standards** - Manufactured in accordance with tested as per PTPS IES 62722, Glowing Wire Test 850°

| Model | Power | Illuminance | Size(mm) |
|---|---|---|---|
| UVERIS-5 | 5W | 500Lm | Ø25-Ø25-49mm |
| UVERIS-10 | 10W | 1000Lm | Ø40-Ø40-75mm |
| UVERIS-15 | 15W | 1500Lm | Ø60-Ø60-96mm |
| UVERIS-25 | 25W | 2500Lm | Ø80-Ø80-123mm |

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

k

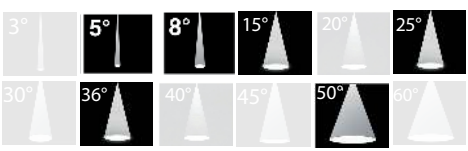

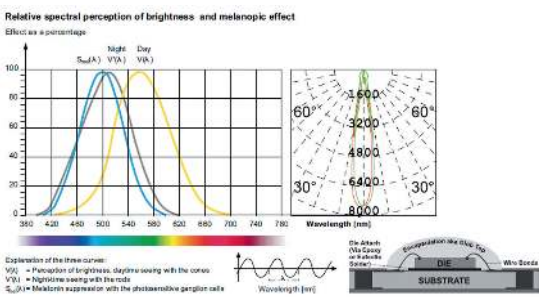
CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP66 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.