
VALENI

VALENI è un faretto da esterno architettonico ad alta potenza progettato per l'illuminazione di facciate su larga scala, strutture monumentali e ampi ambienti paesaggistici. Caratterizzato da una struttura in alluminio per usi gravosi, una robusta resistenza agli agenti atmosferici, una precisa distribuzione del fascio multi-angolo e un montaggio orientabile flessibile, offre un'emissione luminosa eccezionale e un'affidabilità per progetti di illuminazione per esterni impegnativi.



VALENI is a high-power architectural exterior spotlight engineered for large-scale facade illumination, monumental structures, and extensive landscape environments. Featuring heavy-duty aluminum construction, robust weather resistance, precise multi-angle beam distribution, and flexible adjustable mounting, it delivers exceptional luminous output and reliability for demanding outdoor lighting projects.




Description


Housing - High-grade aluminum construction with Tiger powder spraying surface treatment. Designed for outdoor adjustable installation
Diffuser - High-performance optical lens with precise beam control.
Reflector - Precision beam control (5°, 10°, 15°, 25°, 36°, 55°).
LED - Sustainable energy savings enabled by advanced LED technology (Efficiency: 100 Lm/W, UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h, Ta -20°C ~ 50°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722, Glowing Wire Test 850° ; IP66, IK08.

Model	Power	Illuminance	Size(mm)
VALENI- 150	150W	15000Lm	Ø320-150-354mm (with width/bracket base 359 mm)
VALENI- 180	180W	18000Lm	Ø390-156-445mm (with width/bracket base 428 mm)

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

k

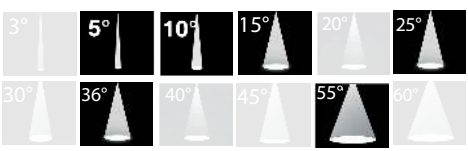

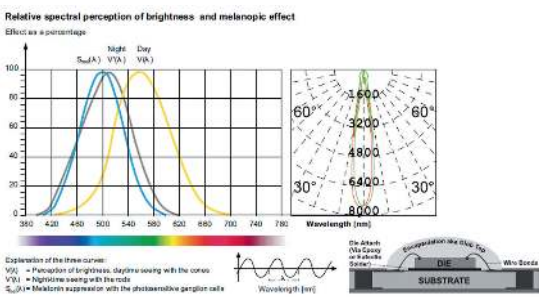

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP66 IK08 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.