
# VELA

La lampada da parete per esterni VELA unisce un'eleganza senza tempo a un design contemporaneo, offrendo una soluzione illuminotecnica raffinata per gli spazi esterni moderni. Il suo aspetto ricercato valorizza i dettagli architettonici e crea un'atmosfera accogliente in ingressi, balconi, terrazze, muri da giardino, vialetti e facciate degli edifici. Ideale per ambienti residenziali, commerciali e ricettivi, VELA si integra armoniosamente con diversi stili architettonici, aggiungendo raffinatezza e funzionalità ai progetti di illuminazione per esterni.



The VELA Outdoor Wall Light combines timeless elegance with a contemporary design, offering a stylish lighting solution for modern exterior spaces. Its refined appearance enhances architectural details while creating a welcoming atmosphere in entrances, balconies, terraces, garden walls, pathways, and building facades. Suitable for residential, commercial, and hospitality environments, VELA complements a variety of architectural styles, adding sophistication and functionality to outdoor lighting projects.




## Description


**Housing** - High-grade aluminium construction with tiger powder spraying surface teatment.
engineered for superior outdoor durability and corrosion resistance.
**Diffuser -** High-transmittance optical diffuser with a precision-angled reflector for glare-free distribution.
**Reflector -** Precision beam control ( 15°/25°/36° ).
**LED -** sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21 )
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
**Standards -** Manufactured in accordance with tested as per PTPS IES62722 , Glowing Wire Test 850°.

| Model | Power | Illuminance | Size(mm) |
|---|---|---|---|
| VELA 20 | 2×10W | 2000Lm | 140mm×H125mm |
| VELA 30 | 2×15W | 3000Lm | 130mm×H155mm |
| VELA 40 | 2×20W | 4000Lm | 130mm×H167mm |
| VELA 50 | 2×25W | 5000Lm | 212mm×H200mm |

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K

k

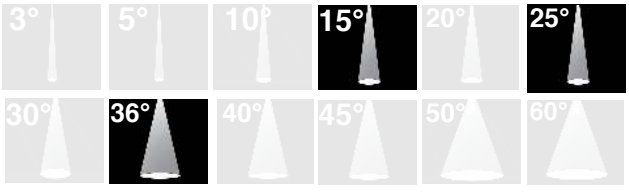

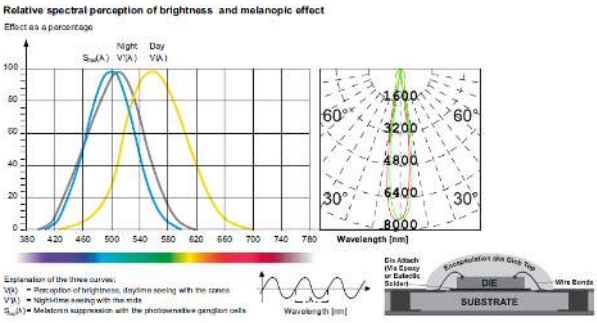
CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP 66 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

IK08 | CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.