VELINA

La lampada da parete per esterni VELINA combina l'eleganza contemporanea con un design raffinato, offrendo una soluzione illuminotecnica di stile per gli spazi esterni moderni. Il suo aspetto sofisticato valorizza i dettagli architettonici e crea un'atmosfera calda e accogliente in ingressi, balconi, terrazze, muri da giardino, vialetti e facciate degli edifici. Ideale per progetti residenziali, commerciali e ricettivi, VELINA si integra armoniosamente con diversi stili architettonici, aggiungendo eleganza e funzionalità ai progetti di illuminazione per esterni.




The VELINA outdoor wall light combines contemporary elegance with a refined design, offering a stylish lighting solution for modern exterior spaces. Its sophisticated appearance enhances architectural details while creating a warm and welcoming atmosphere in entrances, balconies, terraces, garden walls, pathways, and building facades. Ideal for residential, commercial, and hospitality projects, VELINA blends harmoniously with a variety of architectural styles, adding elegance and functionality to outdoor lighting designs.



Description


Housing - High-grade aluminium construction with tiger powder spraying surface teatment.
engineered for superior outdoor durability and corrosion resistance.
Diffuser - High-transmittance optical diffuser with a precision-angled reflector for glare-free distribution.
Reflector - Precision beam control (120°).
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES62722 , Glowing Wire Test 850°.




Model	Power	Illuminance	Size(mm)
VELINA 6	6W	600Lm	140mm×125mm
VELINA 12	2×6W	1200Lm	140mm×125mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K

k

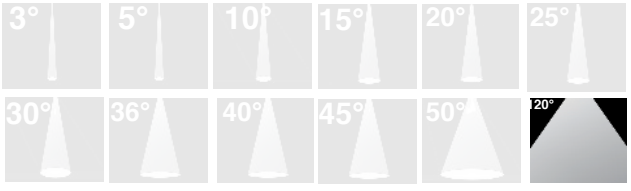

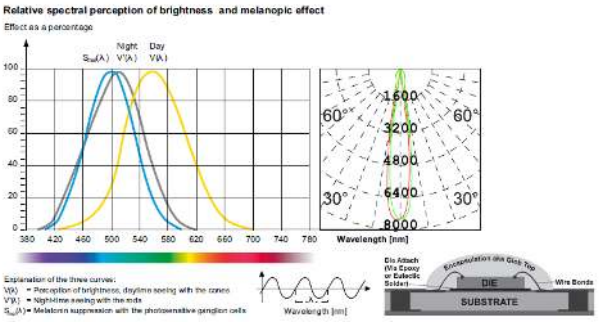

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP 66 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

IK08 | CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.