
VERA

La lampada da parete per esterni VERA unisce un'eleganza senza tempo a un design contemporaneo, offrendo una soluzione illuminotecnica raffinata per gli spazi esterni moderni. Il suo aspetto elegante valorizza i dettagli architettonici e crea un'atmosfera accogliente in ingressi, balconi, terrazze, muri da giardino, vialetti e facciate degli edifici. Ideale per progetti residenziali, commerciali e ricettivi, VERA si abbina armoniosamente a diversi stili architettonici, aggiungendo raffinatezza e funzionalità ai progetti di illuminazione per esterni.



The VERA outdoor wall light combines timeless elegance with a contemporary design, offering a refined lighting solution for modern exterior spaces. Its stylish appearance enhances architectural details while creating a welcoming atmosphere in entrances, balconies, terraces, garden walls, pathways, and building facades. Ideal for residential, commercial, and hospitality projects, VERA complements a variety of architectural styles, adding sophistication and functionality to outdoor lighting designs.

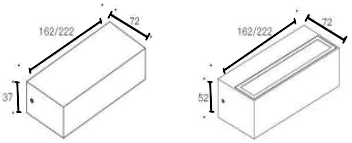


Description


Housing - High-grade aluminium construction with tiger powder spraying surface teatment.
engineered for superior outdoor durability and corrosion resistance.
Diffuser - High-transmittance optical diffuser with a precision-angled reflector for glare-free distribution.
Reflector - Precision beam control (120°).
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES62722 , Glowing Wire Test 850°.

Model	Power	Illuminance	Size(mm)
VERA 30 A	2×15W	3000Lm	37mm×72mm
VERA 30 B	2×15W	3000Lm	55mm×120mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K

k

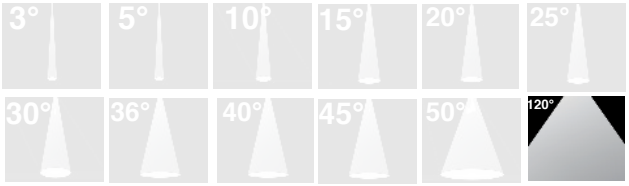

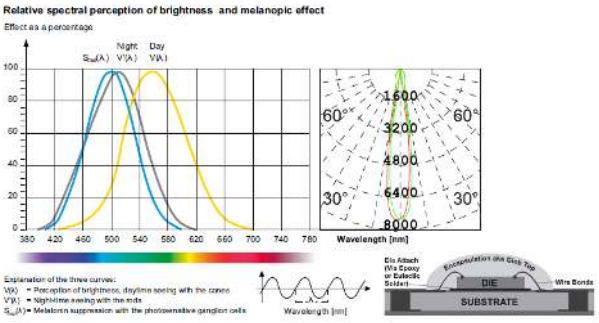

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP 66 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

IK08 | CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.