
VICE



VICE Spot Light combina un design contemporaneo con un'illuminazione mirata, creando un effetto luminoso elegante ed equilibrato negli interni moderni. Il suo aspetto raffinato lo rende ideale per l'illuminazione d'accento, per valorizzare dettagli architettonici ed elementi decorativi. Ideale per applicazioni residenziali, commerciali, retail e hospitality. Grazie al suo design versatile e alle prestazioni illuminotecniche funzionali, VICE offre una soluzione luminosa raffinata per gli spazi contemporanei.

VICE Spot Light combines a contemporary design with focused illumination, creating a stylish and balanced lighting effect for modern interiors. Its elegant appearance makes it suitable for accent lighting, highlighting architectural details, and enhancing decorative features. Ideal for residential, commercial, retail, and hospitality applications. With its versatile design and functional lighting performance, VICE offers a refined lighting solution for contemporary spaces.

Cutout





Description

Housing -Die cast aluminium powder coated with choice of RAL colors
Diffuser - Tempered clear glass.
Reflector - Anodized aluminium reflector with optical PMMA refletor lens.
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722 Glowing wire Test 850°.

Model	Power	Illuminance	Size(mm)	Cutout
VICE 5	5W	500Lm	Ø40mm×H67mm	Ø30mm
VICE 7	7W	700Lm	Ø60mm×H80mm	Ø50mm
VICE 10	10W	1000Lm	Ø75mm×H95mm	Ø65mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

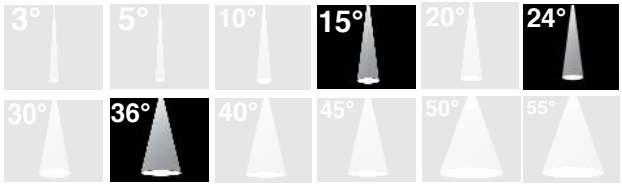

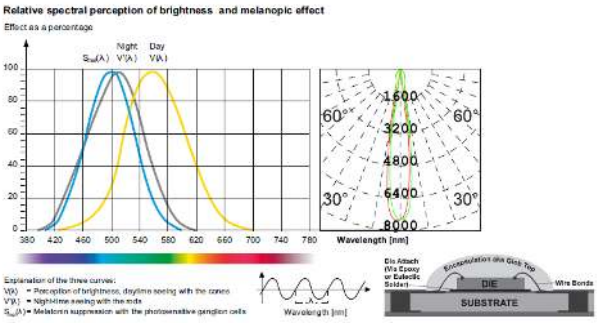

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP20 IP44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | ENERGY STAR | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.