
VIREA

La lampada da parete per esterni VIREA unisce l'eleganza moderna a un design distintivo, offrendo una soluzione illuminotecnica sofisticata per gli spazi esterni contemporanei. Il suo aspetto raffinato valorizza gli elementi architettonici e crea un'atmosfera accogliente in ingressi, balconi, terrazze, muri da giardino, vialetti e facciate degli edifici. Ideale per progetti residenziali, commerciali e ricettivi, VIREA si integra armoniosamente con diversi stili architettonici, aggiungendo eleganza e funzionalità ai progetti di illuminazione per esterni.

The VIREA outdoor wall light combines modern elegance with a distinctive design, creating a sophisticated lighting solution for contemporary exterior spaces. Its refined appearance enhances architectural features while providing a welcoming atmosphere for entrances, balconies, terraces, garden walls, pathways, and building facades. Suitable for residential, commercial, and hospitality projects, VIREA integrates seamlessly with a variety of architectural styles, bringing elegance and functionality to outdoor lighting designs.



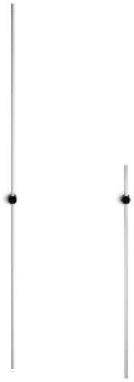


Description


Housing - High-grade aluminium construction with tiger powder spraying surface teatment.
engineered for superior outdoor durability and corrosion resistance.
Diffuser - High-transmittance optical diffuser with a precision-angled reflector for glare-free distribution.
Reflector - Precision beam control (120°).
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES62722 , Glowing Wire Test 850°.

Model	Power	Illuminance	Size(mm)
VIREA	15W	1500Lm	Ø50mm×2060mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K

k

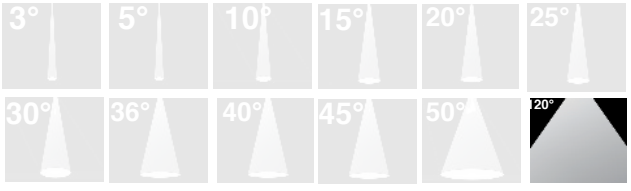

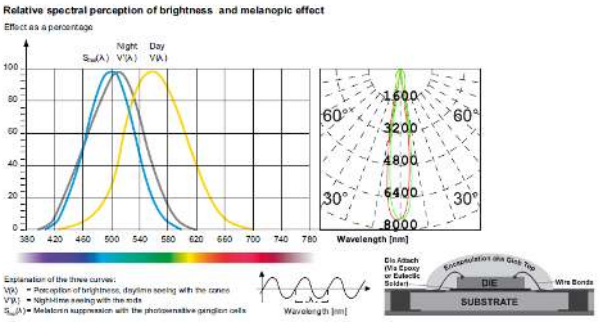

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP 66 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

IK08 | CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.