
VITAA MULTI-SPOT-B

VITAA MULTI-SPOT-B è caratterizzato da un design architetturale compatto e regolabile, progettato per installazioni a soffitto precise. Realizzato con ottiche regolabili ad alte prestazioni, offre una luminosità uniforme, un controllo antiriflesso a incasso profondo e un'illuminazione affidabile per interni moderni, garantendo un profilo del soffitto elegante e strutturato e un comfort visivo superiore per ambienti di lusso.

VITAA MULTI-SPOT-B features a compact, adjustable architectural design engineered for precise ceiling installations. Crafted with high-performance adjustable optics, it offers uniform brightness, deep-recessed anti-glare control, and reliable illumination for modern interiors—delivering a sleek, structured ceiling profile and superior visual comfort for luxury environments.

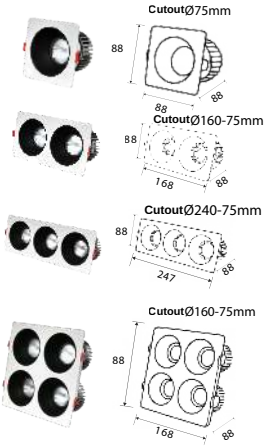


Description


Housing - High-pressure die-cast aluminium housing with solvent-free double anti-corrosion powder coating (Matte White/Black). Designed for recessed installation.
Diffuser - Deep-recessed polycarbonate lens.
Reflector - Anodized aluminum with precision beam control (15°/24°/38°/60°).
LED - Sustainable energy savings enabled by advanced LED technology (Efficiency: 100 Lm/W, UGR<19). L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h, Ta -20°C ~ 50°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722, Glowing Wire Test 850°

Model	Power	Illuminance	Size(mm)	Cutout
VITAA MULTI-SPOT-B1*10	1 x 10W	1000Lm	Ø88-88-88mm	Ø75mm
VITAA MULTI-SPOT-B2*10	2 x 10W	2000Lm	Ø168-88-88mm	Ø160-75mm
VITAA MULTI-SPOT-B3*10	3 x 10W	3000Lm	Ø247-88-88mm	Ø240-75mm
VITAA MULTI-SPOT-B4*10	4 x 10W	4000Lm	Ø168-168-88mm	Ø160-160mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

k

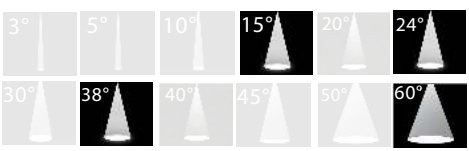

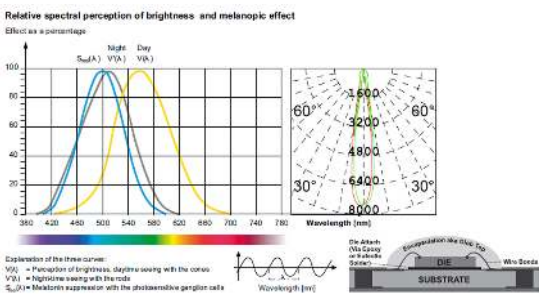

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP20 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.